


HD 7/11-4 Cage Classic

Long service intervals and high-quality components such as the crankshaft pump with ceramic piston are among the many strengths of the HD 7/11-4 Cage Classic single-phase pressure washer.



1 Durable and reliable

- 4-pole electric motor.
- Brass cylinder head and ceramic piston.

2 Robust and secure

- Robust tubular frame construction ensures optimum protection of the machine.
- Built-in handles for transport.

3 Service-friendly

- Excellent access to all relevant components.
- Large water inlet filter for easy servicing.

4 Versatile

- The machine can be attached to the floor or the wall.



HD 7/11-4 Cage Classic

- Durable crankshaft pump with ceramic-coated pistons
- Robust tubular frame construction for maximum protection
- Wall mounting possible

Technical data

Order Number	1.367-318.0	
EAN code	4054278131665	
Current type	Ph / V / Hz	1 / 230 / 50
Flow rate	l/h	520-700
Operating pressure	bar / MPa	70-110 / 7-11
Max. pressure	bar / MPa	150 / 15
Max. water feed temperature	°C	60
Power rating	kW	2,9
Weight	kg	50,5
Dimensions (L x W x H)	mm	640 × 360 × 500

Equipment

Trigger gun	Standard	
High-pressure hose	m	10 / ID 6, 250 bar
Spray lance	mm	600
Power nozzle	■	
ANTI!Twist	-	
Pressure switch control	-	
Infinitely variable pressure and water flow control on the unit	■	
Servo Control	-	
Crankshaft pump with ceramic pistons	■	

■ Included in delivery.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

KÄRCHER




	Order Number	ID	Max. working pressure	Length		Price	Description		
Standard with unions on both sides									
High-pressure hose, 30 m DN 8, including rotary coupling	1	6.390-293.0	ID 8	315 bar	30 m		With rotary coupling, 2 x M 22 x 1.5		▲
High-pressure hose, 15 m DN 8, 315 bar, including rotary coupling	2	6.390-010.0	ID 8	315 bar	15 m				▲
High-pressure hose, 20 m DN 8, 315 bar, extension	3	6.390-031.0	ID 8	315 bar	20 m		With M 22x1.5 union at both ends and anti-kink protection ID 8/155°C/315 bar		▲
High-pressure hose packaged	4	6.391-342.0	ID 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.		□
Longlife 400 with unions on both sides									
High-pressure hose Longlife 400, 15 m, DN 8, including rotary coupling	5	6.389-709.0	ID 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5		▲
High-pressure hose Longlife 400, 20 m, DN 8, extension	6	6.390-027.0	ID 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5		▲
High-pressure hose Longlife 400, 30 m DN 8, including rotary coupling	7	6.390-294.0	ID 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5		▲
High-pressure hose Longlife 400, ID 8, 400 bar, 1.5 m	8	6.392-282.0	ID 8	400 bar	1.5 m		Screw connections at both ends, M 22 x 1.5, with kink protection. Dual layer steel wire reinforced.		□
High-pressure hose 1.5 m, DN 8, including connectors	9	6.390-178.0	ID 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).		□
High-pressure hose Longlife 400, 10 m, DN 8, including rotary coupling	10	6.388-083.0	ID 8	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.		□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

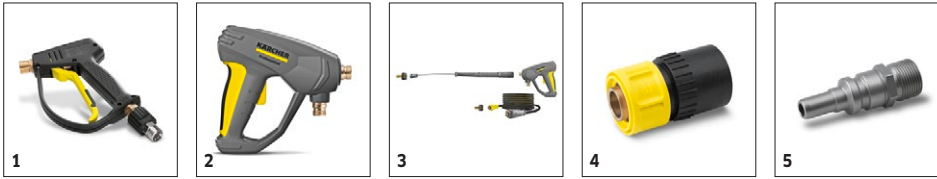

		Order Number	Flow rate				Price	Description	
Trigger guns									
Standard trigger gun	1	9.751-139.0						High-pressure gun for machines of the HD Classic range. With adapter for high-pressure hoses M 22 x 1.5.	■
EASY!Force Advanced	2	4.118-005.0						Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	□
Conversion kit 2 from device	3	4.111-051.0						Provides all the parts required to utilise our EASY!Force technology even on our non-Easy!Force machines. Including adaptors, lance, Easy!Force trigger gun and hose.	□
Quick connect									
Quick coupling	4	6.401-458.0						For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1.5 female.	□
Plug nipple	5	6.401-459.0						Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1.5 male.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0



		Order Number	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power nozzle spray angle 25°	1	2.883-399.0	50					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	■
HP nozzle spray angle 0°									
High-pressure nozzle spray angle 0°	2	2.884-535.0	50					High-pressure nozzle with powerful jet for extremely stubborn dirt.	□
Power nozzle spray angle 15°									
Power nozzle spray angle 15°	3	2.883-390.0	55					Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□
Power nozzle spray angle 40°									
Power nozzle spray angle 40°	4	2.884-524.0	50					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC 1.367-318.0



		Order Number					Price	Description	
Trigger guns									
	1	4.775-026.0							■

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

KÄRCHER



			Order Number	Max. working pressure	Length		Price	Description	
Rotating spray lances									
Rotatable lance, 600 mm, ergonomic	1		4.760-664.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 850 mm, rotatable, ergonomic	2		4.760-663.0	300 bar	840 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
1050 mm lance, rotatable, ergonomic	3		4.760-660.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 1550 mm, rotatable, ergonomic	4		4.760-661.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 2050 mm, rotatable, ergonomic	5		4.760-662.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance									
Lance 250 mm, non-rotatable	6		4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	<input type="checkbox"/>
550 mm lance, non-rotatable	7		4.760-665.0		550 mm			550 mm stainless steel lance. With manual coupling. Non-rotatable.	<input type="checkbox"/>
Jet pipe for replacement 600mm	8		9.751-140.0						<input type="checkbox"/>
Angular spray lance									
WC and gutter lance	9		4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	<input type="checkbox"/>
Flexible spray lance									
Flexible lance 1050 mm	10		6.394-654.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	<input type="checkbox"/>
Articulated joint M18x1,5	11		4.481-039.0	300 bar				High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	<input type="checkbox"/>
Telescopic spray lance									
Telescopic jet pipe	12		6.394-690.0	225 bar	5400 mm			Can be continuously extended from 1.8 to 5.4 m. For cleaning areas that are difficult to reach, such as ceilings or facades. With integrated HD trigger gun, M 22 x 1.5 connection with rotary coupling. Connection for M 18 x 1.5 nozzles.	<input type="checkbox"/>
Restraint belt for telescopic jet pipe	13		6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	<input type="checkbox"/>
Gutter cleaner									
Gutter cleaning lance	14		2.642-305.0					The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	<input type="checkbox"/>
Undercarriage spray lance									
Underbody lance	15		4.760-245.0		700 mm			Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0



		Order Number	Max. working pressure	Nozzle size			Price	Description
Dirt Blaster, small								
Dirt blaster - more Performance	1	4.767-233.0	180 bar	50				Full power against stubborn dirt: the new performance dirt blaster with nozzle size 050 achieves up to 50% higher cleaning and area performance than its predecessor. <input type="checkbox"/>
Dirt blaster, large								
Dirt blaster - without changeover function	2	4.763-253.0	300 bar	50				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. <input type="checkbox"/>
Triple nozzles								
Triple nozzle 053	3	4.767-155.0	300 bar	53				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5. <input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

KÄRCHER



		Order Number	Max. working pressure	Nozzle size	Diame-ter		Price	Description
Pipe cleaning hose, ID 6								
Hose assembly TR pipe cleaning DN6 max.2	1	6.110-046.0	250 bar					The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). <input type="checkbox"/>
Pipe cleaning hose	2	6.390-028.0	120 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). <input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	3	6.110-008.0	250 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). <input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m	4	6.390-029.0	120 bar					30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). <input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	5	6.110-047.0	250 bar					The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). <input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	6	6.390-030.0	250 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). <input type="checkbox"/>
Pipe cleaning nozzle								
Dirt blaster pipe cleaning D21/060	7	4.765-002.0		60	21 mm			The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling. <input type="checkbox"/>
Dirt blaster pipe cleaning D30/060	8	4.765-005.0		60	30 mm			<input type="checkbox"/>
Pipe cleaning nozzle	9	5.763-015.0		55	16 mm			16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>
	10	5.763-016.0		60	16 mm			<input type="checkbox"/>
	11	5.763-017.0		50	30 mm			30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>
Rotating pipe cleaning nozzle	12	6.415-428.0		50	16 mm			Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

KÄRCHER




		Order Number	Flow rate	Nozzle size	Diame-ter	Price	Description	
Hard Surface Cleaner FRV 30								
FRV 30	1	2.642-999.0					With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. Machine specific nozzle kit must be ordered separately.	<input type="checkbox"/>
Add-on kit rubber lip	2	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	3	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
Add-on kit hose attachment	4	2.642-528.0					Suction cup for fixing the suction hose to smooth surfaces.	<input type="checkbox"/>
Add-on kit dirt trap	5	2.642-532.0					Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	<input type="checkbox"/>
Hard surface cleaner FR 30								
Surface Cleaner FR 30	6	2.642-997.0			300 mm		Up to 10 times greater area coverage compared with the conventional high pressure jet.	<input type="checkbox"/>
Hard surface cleaner FR 30 ME								
FR 30 ME surface cleaner	7	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Hard Surface Cleaner FR 50								
FR 50 surface cleaner	8	2.640-679.0			500 mm		Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
Machine-specific nozzle kit for FR								
Nozzle kit for surface cleaners (type-specific) 650 - 850 l/h	9	2.639-187.0	650-850 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit 050 - for FRV	10	2.642-433.0		50			Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	<input type="checkbox"/>
Hard surface cleaner FRV 30 Me								
FRV 30 ME	11	2.642-911.0					Surface cleaner with integrated waste water pick-up	<input type="checkbox"/>
Extension hose FRV 30 Me and FRV 50 Me	12	4.441-040.0					5 m extension hose for FRV 30 Me. Includes connecting adapter.	<input type="checkbox"/>
Surface Cleaner FR 50 Me								
FRV 50 ME	13	2.643-598.0					Surface cleaning with automatic suction of the dirty water for very large surfaces. Hot water cleaning up to 85°C.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

KÄRCHER

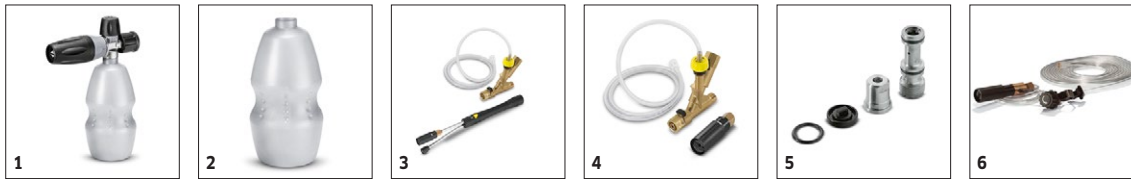

		Order Number	Flow rate				Price	Description	
Cup foam lance									
Foam lance nozzle Ø1,5	1	6.394-969.0							<input type="checkbox"/>
Tank grey only for replacement 1L	2	6.414-050.0						Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	<input type="checkbox"/>
Inno Foam Set									
Inno foam kit with detergent injector	3	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	4	2.640-691.0						HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	5	2.640-688.0	700-1000 l/h					Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle kit	6	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0



		Order Number				Price	Description	
HP detergent injector								
Detergent injector for high pressure	1	3.637-170.0					Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Detergent injector for high and low pressure (without nozzles)	2	3.637-001.0					Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170								
Nozzle insert trapezoidal thread HDS-GER	3	4.769-011.0					For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170.0 750-1000 l/h	4	4.769-047.0						<input type="checkbox"/>
Nozzle insert with order no. 3.637-001								
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	5	4.769-003.0					Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Low pressure for units rated up to 1100 l/h	6	4.769-001.0					For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>
Rotary coupling								
Rotary coupling	7	4.401-091.0					Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	<input type="checkbox"/>
Coupling								
Coupler -2xM22x1,5	8	4.403-002.0					Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
Connector								
Nozzle connector/screw connector	9	4.402-022.0					Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Y distributor	10	4.405-048.0					Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	<input type="checkbox"/>
	11	4.111-024.0						<input type="checkbox"/>
Adapter								
Adapter M22 - Swivel	12	4.424-004.0					M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>
Adapter EASY!Lock								
Adapter 1 M22AG-TR22AG	13	4.111-029.0					Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	14	4.111-030.0					Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	15	4.111-031.0					Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	16	4.111-033.0					Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	17	4.111-034.0					Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	18	4.111-035.0					Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	19	4.111-036.0					Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC 1.367-318.0



20

		Order Number					Price	Description	
ADAPTER for replacement TR22IG-M22AG Er	20	4.111-046.0						Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC 1.367-318.0




		Order Number	Length				Price	Description	
Automatic, self-winding hose reels									
Add-on kit hose reel TR 40m	1	6.392-442.0	40 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	<input type="checkbox"/>
Swivel holder	2	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
ABS wall fastening stainless steel	3	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>
Add-on kit hose reel plastics	4	6.392-074.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	5	6.392-083.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Hose reel, automatic, 20 m, painted	6	6.392-106.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Hose reel, automatic, basalt grey-coated	7	6.392-105.0	20 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	8	6.392-076.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS hose reel stainless steel	9	6.392-122.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

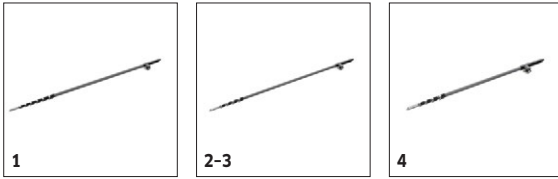

		Order Number	Flow rate	Water feed temperature	Length	Length	Price	Description	
Solar cleaning - telescopic lances									
Telescopic rod complete 14m	1	4.110-002.0		max. 60 °C				Full carbon telescopic rod for maximum rigidity with minimal weight. With 14 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m CFK	2	4.110-007.0		max. 60 °C				The full carbon telescopic lance offers maximum rigidity with minimal weight. It has a reach of up to 10 m and is fitted with practical quick-release couplings - for convenient extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m	3	4.110-003.0		max. 60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 10 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
iSolar TL 7 H (without hose)	4	4.110-004.0		max. 60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 7.2 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0




		Order Number	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle pack for wet blasting attachment									
Nozzle kit for wet blasting attachment 050	3	2.637-902.0	50					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0

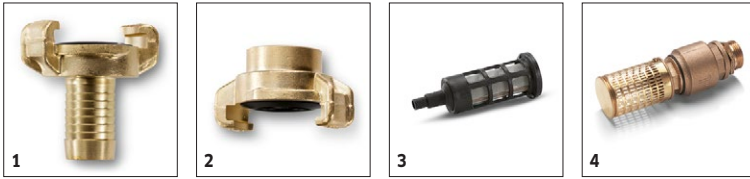

		Order Number		Price	Description	
Geka coupling						
With hose nozzle, R 3/4"	1	6.388-455.0			with hose liner	<input type="checkbox"/>
With female thread, R 3/4"	2	6.388-473.0			with female thread	<input type="checkbox"/>
Suction filter						
Water filter	3	6.414-956.0			Suitable for ponds, storage tanks or similar. polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	<input type="checkbox"/>
Suction filter with check valve	4	4.730-012.0			Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0



		Order Number		Price	Description	
Fine-mesh water filter						
Fine-mesh water filter with adapter	5	4.730-102.0			Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water supply hose						
Water supply hose	6	4.440-038.0			NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0



		Order Number			Price	Description	
Backflow check valve							
Backflow preventer	7	2.641-374.0				To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>
Other HP Accessories							
Starting current limiter	8	2.637-495.0				Reduces starting current in single-phase supply and protects line fuse.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 7/11-4 CAGE CLASSIC

1.367-318.0



		Order Number	Flow rate				Price	Description	
Push-on washing brush									
Push-on washing brush	1	4.762-497.0						With clamp for mounting directly to units' double or triple nozzle. Fits on new double and triple nozzles.	<input type="checkbox"/>
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, nylon bristles	2	4.762-561.0	500-800 l/h					The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 x 1.5, replaceable brush insert).	<input type="checkbox"/>
Rotating wash brush for < 800 l/h machines, natural bristles	3	4.762-560.0	500-800 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.