

ATTIX 961-01

ATTIX 963-21 ED XC

ATTIX 965-21 SD XC

Operating instructions



Contents

1	Important safety instructions	2
2	Description	2.1 Operating elements	6
		2.2 Operating panel.....	7
3	Before starting the cleaner	3.1 Assembling the vacuum cleaner.....	8
		3.1.1 Taking accessories out of the packaging.....	8
		3.1.2 Attaching the suction pipe holder to the suction pipe ¹⁾	8
		3.1.3 Inserting the filter bag (ATTIX 961-01)	9
		3.1.4 Inserting the disposal bag (ATTIX 965-21 SD XC)	10
		3.1.5 Inserting the disposal bag (ATTIX 963-21 ED XC).....	11
4	Control / Operation	4.1 Connections	12
		4.1.1 Connecting the suction hose	12
		4.1.2 Electrical connection	12
		4.2 Switching on the vacuum cleaner.....	12
		4.2.1 Switch " I-0-II " ¹⁾	12
		4.2.2 Switch „ auto-0-I “ ¹⁾	12
		4.2.3 Suction power control ¹⁾	13
		4.2.4 Auto-On/Off-Operation - "auto" switch position ¹⁾	13
		4.3 Cleaning the filter element	14
		4.3.1 Cleaning the filter element (Push&Clean System) ¹⁾	14
		4.3.2 Cleaning the filter element " XtremeClean " (ATTIX 963-21 ED XC, ATTIX 965-21 SD XC)	14
5	Applications and methods	5.1 Techniques	15
		5.1.1 Picking up dry substances.....	15
		5.1.2 Picking up liquids.....	15
6	After using the cleaner	6.1 Switching the vacuum cleaner off and storage.....	16
7	Maintenance	7.1 Maintenance plan.....	17
		7.2 Maintenance work	18
		7.2.1 Emptying the dirt tank (ATTIX 961-01)	18
		7.2.2 Emptying the dirt tank (ATTIX 965-21 SD XC)	19
		7.2.3 Replacing the filter bag(ATTIX 961-01)	20
		7.2.4 Replacing the disposal bag (ATTIX 965-21 SD XC)	21
		7.2.5 Replacing the disposal bag (ATTIX 963-21 ED XC)	22
		7.2.6 Replacing filter element.....	23
8	Troubleshooting	24
9	Further information	9.1 Recycling the vacuum cleaner	25
		9.2 Guarantee	25
		9.3 Tests and approvals.....	25
		9.4 EU Declaration of Conformity.....	26
		9.5 Technical data	27
		9.6 Optional accessories	27

¹⁾Optional accessories / Option depending on model
Original Instructions

(EN) 1 Important safety instructions

Symbols used to mark instructions



Prior to using the appliance for the first time, be sure to read this document through and keep it ready to hand.

	DANGER
	Danger that leads directly to serious or irreversible injuries, or even death.
	WARNING
	Danger that can lead to serious injuries or even death.
	CAUTION
	Danger that can lead to minor injuries and damage.

The appliance must

- only be used by persons, who have been instructed in its correct usage and explicitly commissioned with the task of operating it
- only be operated under supervision
- This machine is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge.
- Children shall be supervised to make sure that they do not play with the appliance.

1. Do not use any unsafe work techniques.
2. Never use the vacuum cleaner without a filter.
3. Switch off the appliance and disconnect the mains plug in the following situations:
 - Prior to cleaning and servicing
 - Prior to replacing components
 - If foam develops or liquid emerges

Besides the operating instructions and the binding accident prevention regulations valid in the country of use, observe recognised regulations for safety and proper use.

Purpose and intended use

The appliance is suitable for picking up dry, non-flammable dust and liquids.

Do not use the ATTIX 963-21 ED XC to pick up liquids.

The appliance is suitable for commercial use, such as e.g. in

- | | |
|---|--|
| <ul style="list-style-type: none"> • Hotels • Schools • Hospitals • Factories | <ul style="list-style-type: none"> • Shops • Offices • Hire shops |
|---|--|



Any other use is considered as improper use. The manufacturer accepts no liability for any damage resulting from such use. The risk for such use is borne solely by the user.
Proper use also includes proper operation, servicing and repairs as specified by the manufacturer.

Transport

1. Before transporting the dirt tank, close all the locks.
2. Do not tilt the cleaner if there is liquid in the dirt tank.
3. Do not use a crane hook to lift the cleaner.

Storage

1. Store the appliance in a dry place, protected from frost.

Electrical connection

1. It is recommended that the vacuum cleaner should be connected via a residual current circuit breaker.
2. Arrange the electrical parts (sockets, plugs and couplings) and lay down the extension lead so that the protection class is maintained.
3. Connectors and couplings of power supply cords and extension leads must be watertight.

Extension lead

1. As an extension lead, only use the version specified by the manufacturer or one of a higher quality. See operating instructions.
2. When using an extension lead, check the minimum cross-sections of the cable:

Cable length	Cross section	
	< 16 A	< 25 A
up to 20 m	1.5 mm ²	2.5 mm ²
20 to 50 m	2.5 mm ²	4.0 mm ²

Guarantee

Our general conditions of business are applicable with regard to the guarantee.

Unauthorised modifications to the appliance, the use of incorrect brushes in addition to using the appliance in a way other than for the intended purpose exempt the manufacturer from any liability for the resulting damage.



Risks

Electrical components

	DANGER
	<p>Electric shock due to faulty mains connecting lead.</p> <p>Touching a faulty mains connecting lead can result in serious or even fatal injuries.</p> <ol style="list-style-type: none"> 1. Do not damage the mains power lead (e.g. by driving over it, pulling or crushing it). 2. Regularly check whether the power cord is damaged or shows signs of ageing. 3. Have the faulty mains connecting lead replaced by your Nilfisk service representative or a qualified electrician prior to using the appliance again.

	DANGER
	<p>The upper section of the vacuum cleaner contains live components.</p> <p>Contact with live components leads to serious or even fatal injuries.</p> <ol style="list-style-type: none"> 1. Never spray water on to the upper section of the vacuum cleaner.

	CAUTION
	<p>Appliance socket ¹⁾</p> <p>The appliance socket is only designed for the purposes defined in the operating instructions.</p> <ol style="list-style-type: none"> 1. The connection of different appliances can result in damage. 2. Prior to plugging in an appliance, always switch off the vacuum cleaner and the appliance that is to be connected. 3. Read the operating instructions to the appliance to be connected and observe the safety notes contained in these.

	CAUTION
	<p>Damage due to unsuitable mains voltage.</p> <p>The appliance can be damaged as a result of being connected to an unsuitable mains voltage.</p> <ol style="list-style-type: none"> 1. Ensure that the voltage shown on the rating plate corresponds to the voltage of the local mains power supply.

EN

Picking up liquids

CAUTION
 <p>Picking up liquids.</p> <p>ATTIX 965-21 SD XC: Due to their construction vacuum cleaners with a removable tank (SD) do not have an automatic level indicator. There is a risk of damage to the vacuum cleaner due to overfilling or of damage due to leakage of the picked up liquid.</p> <ol style="list-style-type: none"> 1. Never pick up more than 40 litres at once. 2. Switch off the vacuum cleaner and empty the dirt tank.

Hazardous materials


WARNING
 <p>Hazardous materials.</p> <p>Vacuuming up hazardous materials can lead to serious or even fatal injuries</p> <ol style="list-style-type: none"> 1. The following materials must not be picked up by the vacuum cleaner: <ul style="list-style-type: none"> - hazardous dust - hot materials (burning cigarettes, hot ash, etc.) - flammable, explosive, aggressive liquids (e.g. petrol, solvents, acids, alkalis, etc.) - flammable, explosive dust (e.g. magnesium or aluminium dust, etc.)

Spare parts and accessories

CAUTION
 <p>Spare parts and accessories.</p> <p>The use of non-genuine spare parts and accessories can impair the safety of the appliance.</p> <ol style="list-style-type: none"> 1. Only use spare parts and accessories from Nilfisk. 2. Use only the brushes supplied with the vacuum cleaner or specified in the operating manual.

Emptying dirt tank



CAUTION
 <p>Picking up environmentally hazardous materials.</p> <p>Materials picked up can present a hazard to the environment.</p> <ol style="list-style-type: none"> 1. Dispose of the dirt in accordance with legal regulations.

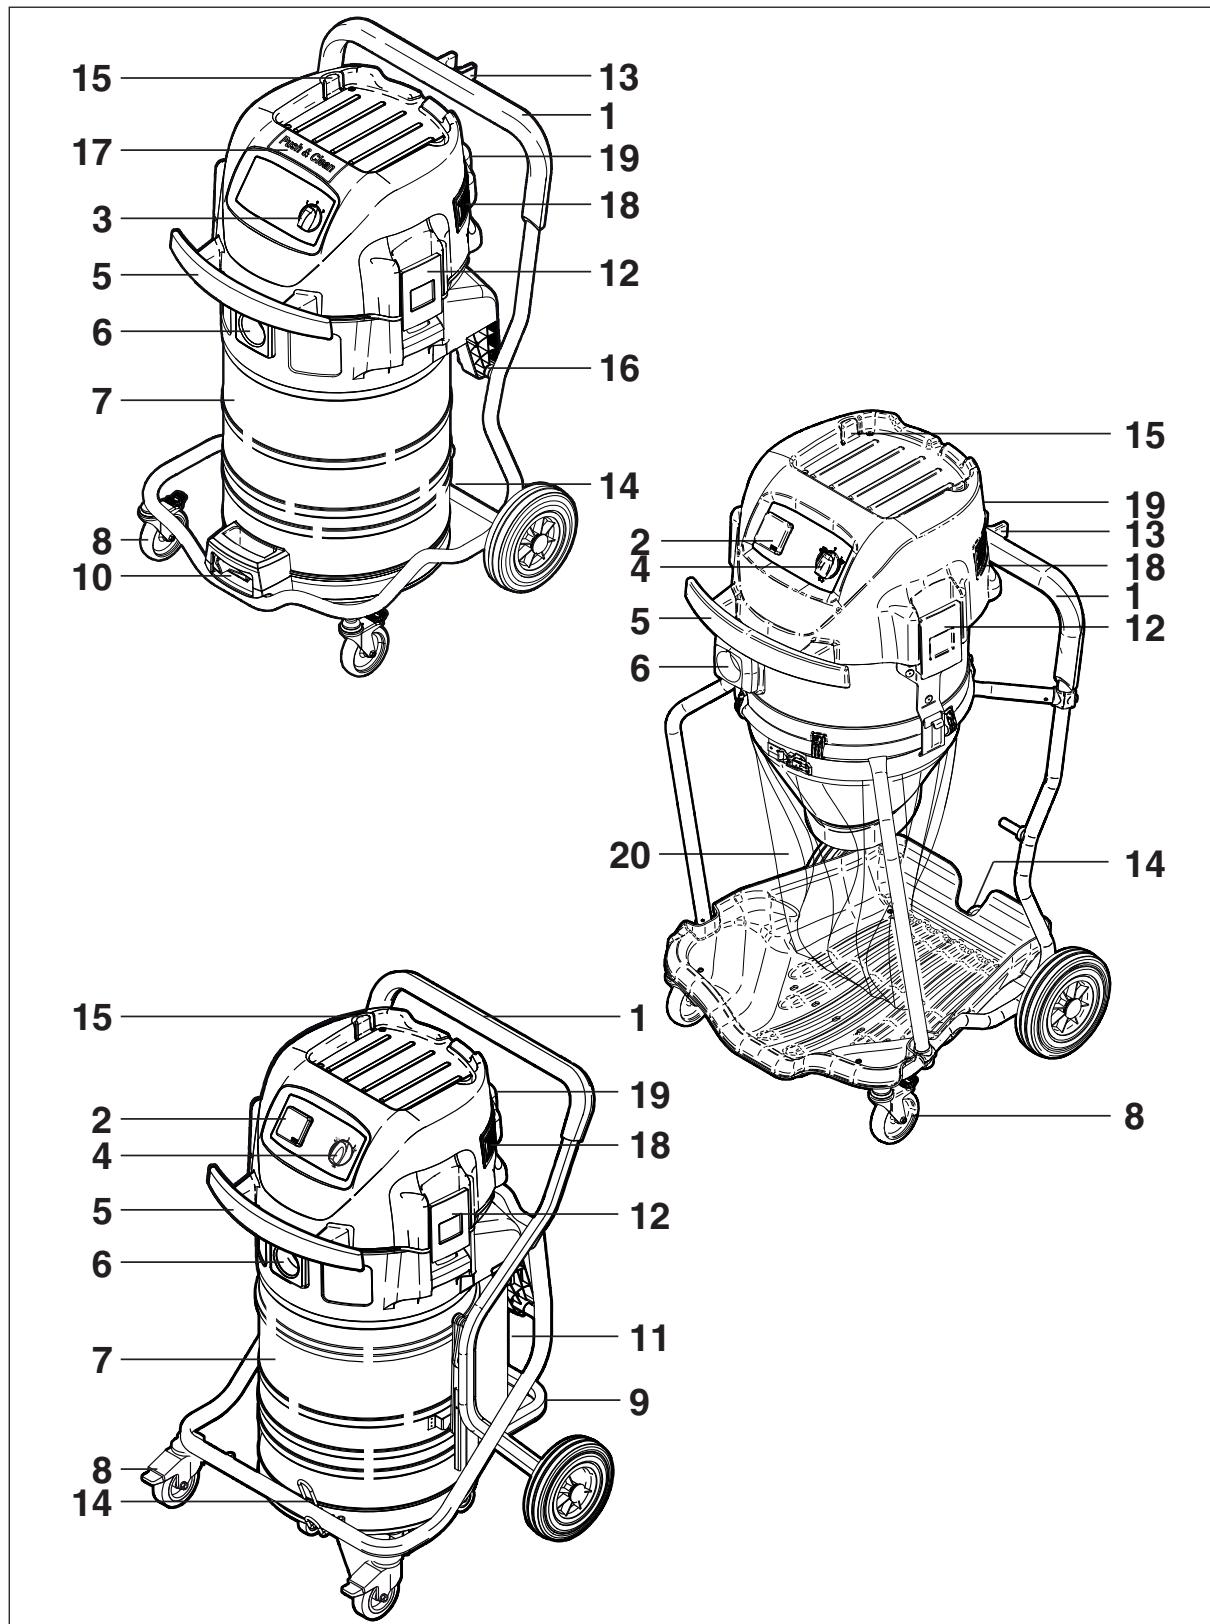(EN) 2 Description**2.1 Operating elements**

EN

- 1 Handle
- 2 Appliance socket ¹⁾
- 3 Appliance switch "I-0-II" ¹⁾
- 4 Appliance switch with suction power control 'auto-0-I' ¹⁾
- 5 Receptacle for electrical lead
- 6 Inlet fitting
- 7 Dirt tank
- 8 Castor with brake
- 9 Swivel bar to remove dirt tank ¹⁾
- 10 Grip to empty tank ¹⁾
- 11 Handle to remove dirt tank ¹⁾
- 12 Retaining clamp
- 13 Suction pipe support ¹⁾
- 14 Bracket for floor nozzle ¹⁾
- 15 Accessory holder
- 16 Clamps and hinges for dirt tank ¹⁾
- 17 Operating knob for filter cleaning ¹⁾
- 18 Inlet for fresh air
- 19 Outlet for waste air
- 20 Disposal bag

2.2 Operating panel

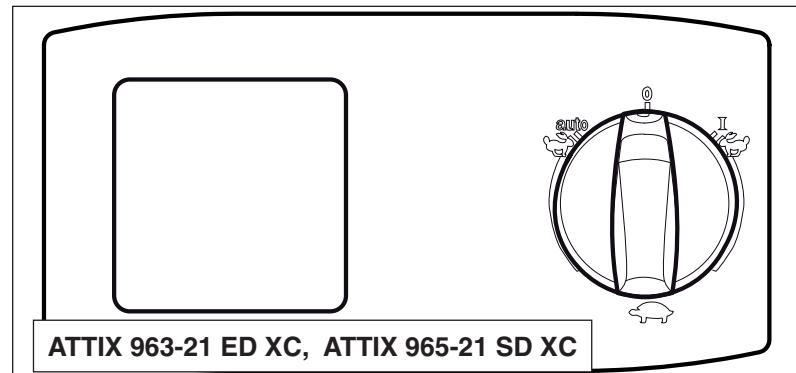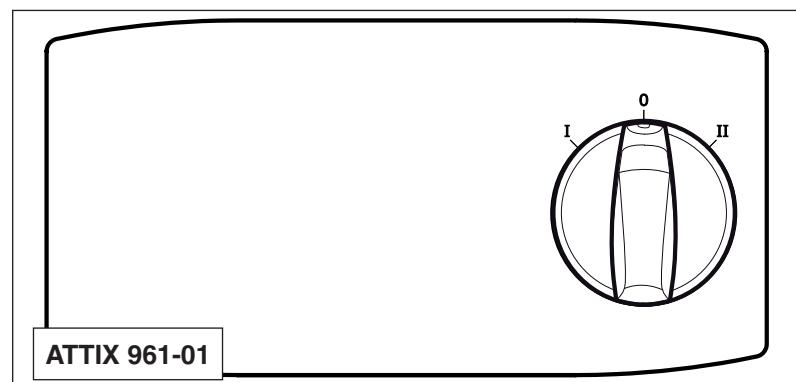


¹⁾Optional accessories / Option depending on model
Original Instructions



(EN) 3 Before starting the cleaner

3.1 Assembling the vacuum cleaner

3.1.1 Taking accessories out of the packaging

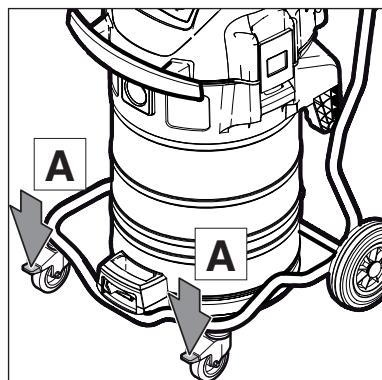


1. Take vacuum cleaner and accessories out of the packaging.
2. The mains plug should not yet be inserted into a socket.
3. Apply parking brakes (A) on both castors.

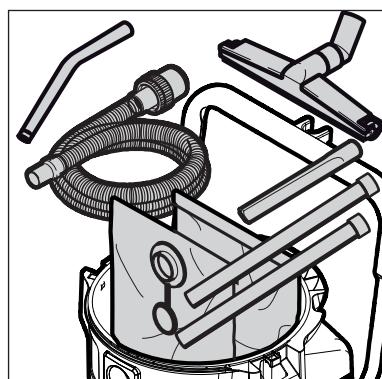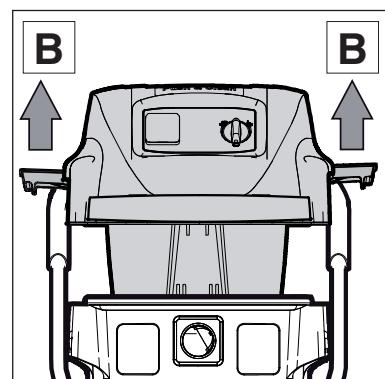


4. Open the retaining clamps (B) and remove the upper section of the vacuum cleaner.
5. Take the accessories ¹⁾ out of the dirt tank and the packaging.

3.1.2 Attaching the suction pipe holder to the suction pipe ¹⁾

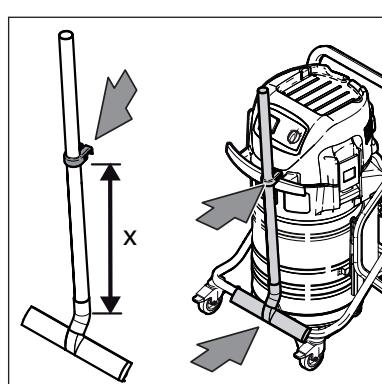


1. Attach the suction pipe holder to the suction pipe.

Accessory diameter	Distance (x) from pivot joint to the floor nozzle cm
38	52
50	47

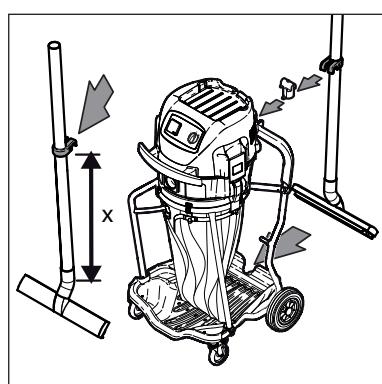


EN


3.1.3 Inserting the filter bag (ATTIX 961-01)

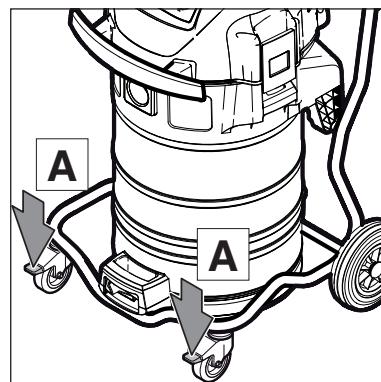


1. The mains plug should not yet be inserted into a socket.
2. Apply parking brakes (A) on both castors.

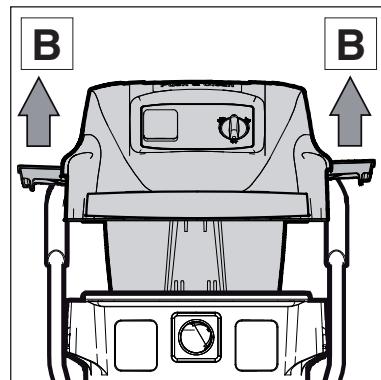

3. Open the retaining clamps (B) and remove the upper section of the vacuum cleaner.

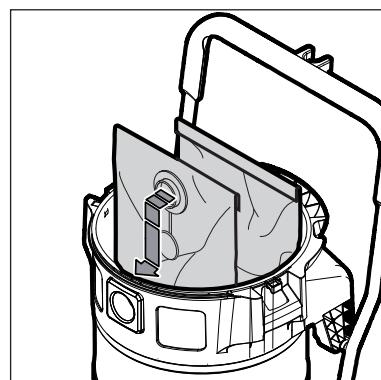


4. Insert the filter bag (C) in the dirt tank.

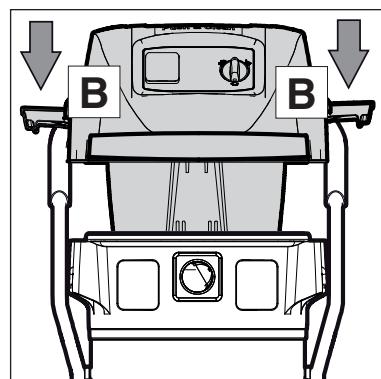


5. Attach the upper section of the vacuum cleaner.
6. Close the retaining clamps (B). Ensure that the retaining clamps fit properly.

EN


3.1.4 Inserting the disposal bag (ATTIX 965-21 SD XC)

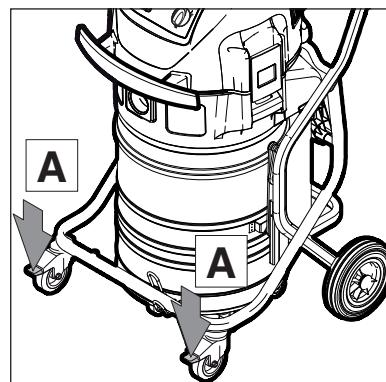


1. The mains plug should not yet be inserted into a socket.
2. Apply parking brakes (A) on both castors.

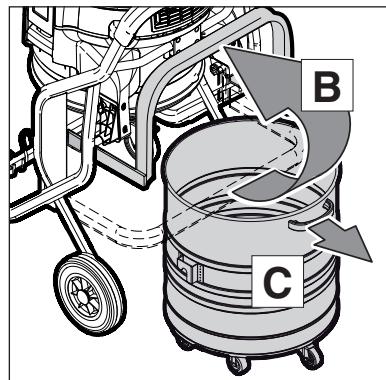

3. Swing the bar (B) upwards.
4. Use the handle (C) to pull the dirt tank out of the vacuum cleaner.

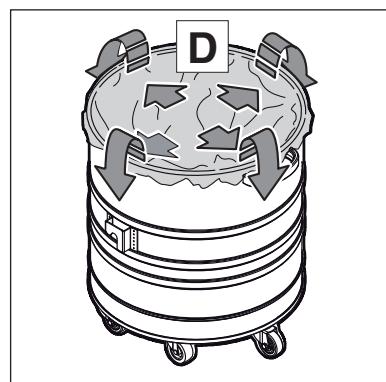


5. Insert the disposal bag (D) in the dirt tank.
6. Fold the top edge of the disposal bag over the rim of the dirt tank.

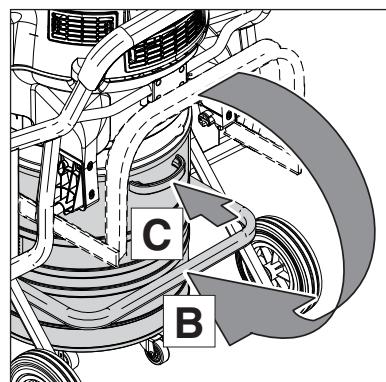


7. Push the dirt tank as far as possible into the vacuum cleaner.
8. Swing the bar (B) downwards without forcing it.

EN


**3.1.5 Inserting the disposal bag
(ATTIX 963-21 ED XC)**

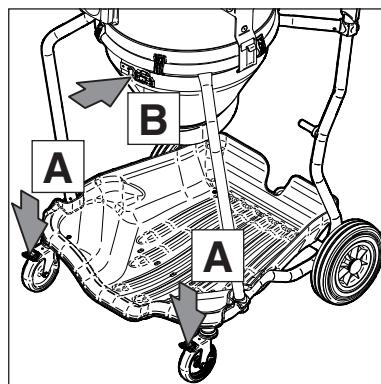


1. The mains plug should not yet be inserted into a socket.
2. Apply parking brakes (A) on both castors.
3. Open clamping ring (B).

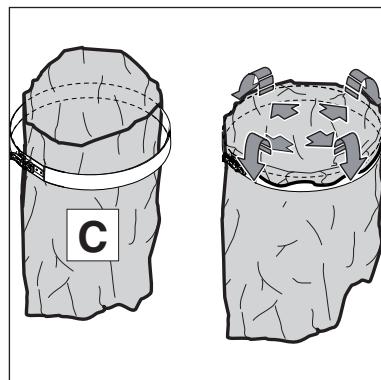

4. Insert disposal bag (C) into clamping ring.
5. Fold the top edge of the disposal bag over the rim of the clamping ring.

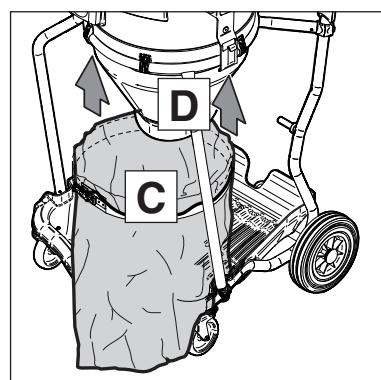

6. Attach the new disposal bag (C) onto the storage container (D).

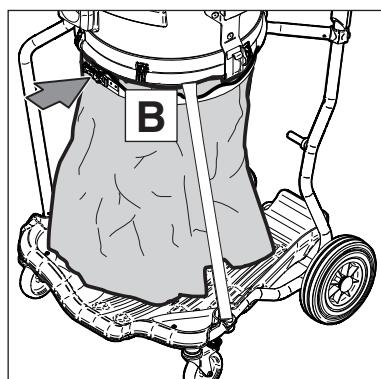


7. Close clamping ring (B).

(EN) 4 Control / Operation


4.1 Connections

4.1.1 Connecting the suction hose

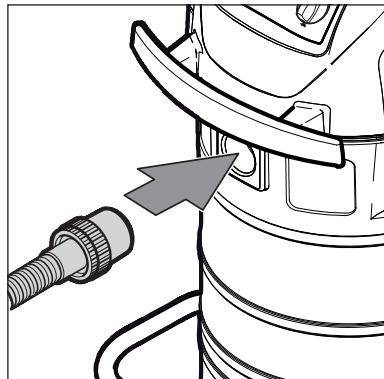

4.1.2 Electrical connection


The operating voltage shown on the rating plate must correspond to the voltage of the mains power supply.

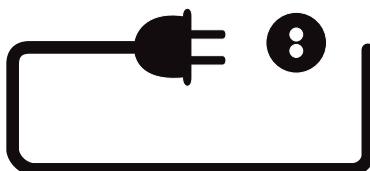

1. Connect the suction hose.

4.2 Switching on the vacuum cleaner


4.2.1 Switch "I-0-II" ¹⁾

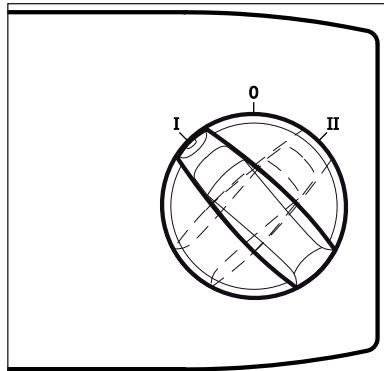

1. Ensure that the cleaner is switched off.
2. Insert the power cord into a properly installed and fused socket with earthing contact.

Switch position	Function
I	Reduced suction
0	Off
II	Maximum suction


4.2.2 Switch „auto-0-I“ ¹⁾

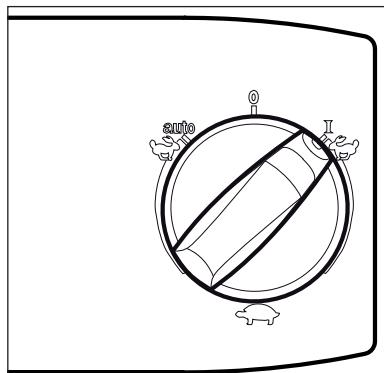

Switch position	Function
I	Maximum suction

EN

4.2.3 Suction power control¹⁾

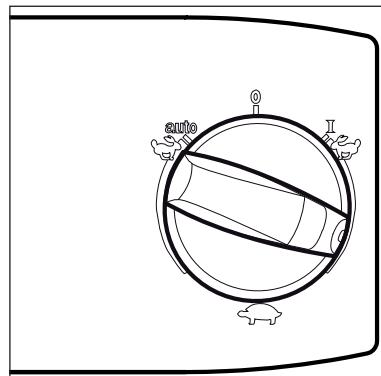

Switch position	Function
	The suction power control switch allows precise adaptation of the suction power for different cleaning tasks.



4.2.4 Auto-On/Off-Operation - "auto" switch position¹⁾

The vacuum cleaner is switched on and off by the power tool connected. Dirt is picked up from the source of dust immediately.


To comply with regulations, only approved dust producing tools should be connected.

The maximum power consumption of the connected electrical appliance is stated in section 9.5 "Technical data".

Before switching the switch to position „auto“, ensure that the tool connected to the appliance socket is switched off.

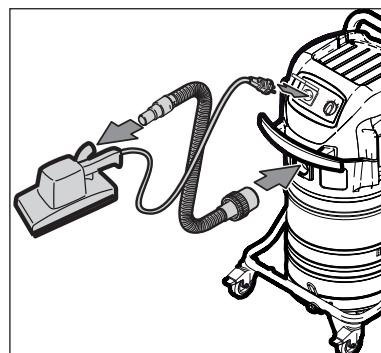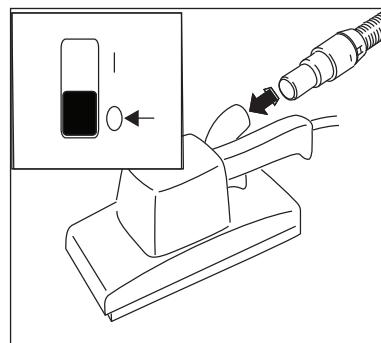

1. Switch off the vacuum cleaner.
2. Switch off the power tool.
3. Connect the power tool and the vacuum cleaner with a suction hose.
4. Insert the plug of the power tool into the tool socket on the operating panel of the vacuum cleaner.
5. Switch on the vacuum cleaner. Switch in "auto" position.
6. Switch on the power tool. The vacuum cleaner motor starts when the connected power tool is switched on.
When the power tool is switched off, the vacuum cleaner continues to run for a short moment so that any dust in the suction hose is conveyed to the filter bag.

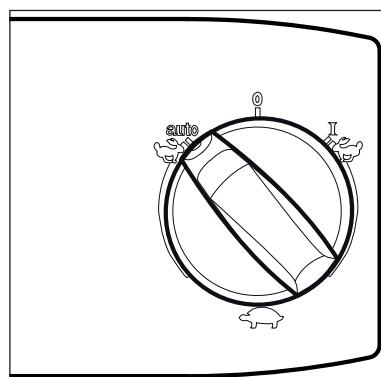


¹⁾Optional accessories / Option depending on model
Original Instructions

EN

4.3 Cleaning the filter element

4.3.1 Cleaning the filter element (Push&Clean System)¹⁾

Only for vacuum cleaning without a filter bag and without a cloth insert filter.

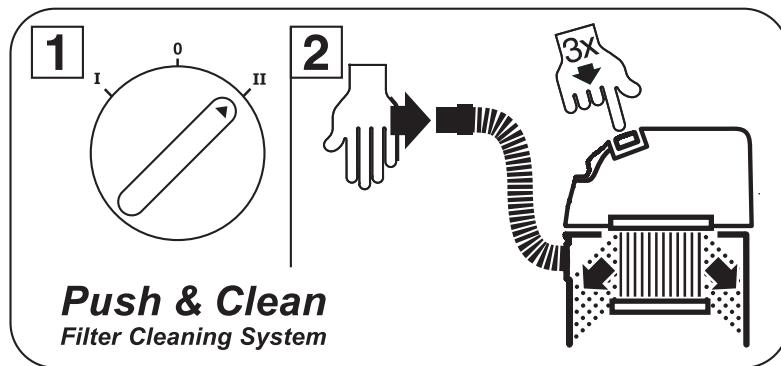


If suction performance drops:

1. Turn switch to position "II" (maximum suction power).
2. Close the nozzles or suction hose opening with the palm of your hand.
3. Press the button to start filter cleaning three times. The resulting stream of air removes attached dust from the slats of the filter elements.

4.3.2 Cleaning the filter element "XtremeClean" (ATTIX 963-21 ED XC, ATTIX 965-21 SD XC)

Only for vacuum cleaning without a cloth insert filter.

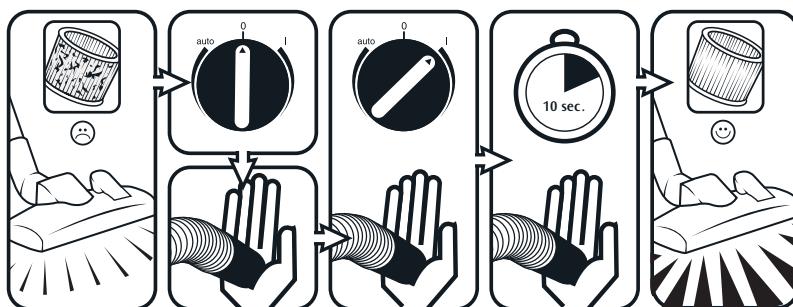

To ensure that suction performance is always at its best, the filter element is automatically cleaned during operation. We recommend complete cleaning if the filter element becomes extremely dirty.

1. Switch off the vacuum cleaner
2. Close the nozzles or suction hose opening with the palm of your hand.
3. Turn the switch to position „I“ and let the cleaner operate for approx. 10 seconds with the suction hose opening closed.

5 Applications and techniques

5.1 Techniques

If used correctly, additional accessories, suction nozzles and suction hoses can enhance the cleaning action and reduce the cleaning effort.

Effective cleaning is achieved if you follow just a few guidelines in combination with your own practical experience in special fields.

Here are some basic tips.

5.1.1 Picking up dry substances

CAUTION!

Do not pick up flammable substances.

Before picking up dry substances, always ensure that a filter bag is inserted in the tank (see section 9.6 "Accessories" for order number). Disposal of the picked up material is then simple and hygienic.

After picking up liquids, the filter element is wet. A damp filter element clogs more quickly when dry substances are picked up. For this reason the filter element should be washed and dried or replaced by a dry element before dry substances are picked up.

5.1.2 Picking up liquids

CAUTION!

Do not pick up flammable liquids.


Do not use the ATTIX 963-21 ED XC to pick up liquids.

Before liquids are picked up, always remove the filter bag/disposal bag.

The use of a separate filter element or filter screen is recommended.

If foam appears, stop work immediately and empty the tank.

To reduce the amount of foam, use foam killer Nilfisk Foam Stop (see section 9.6 "Accessories" for order number).

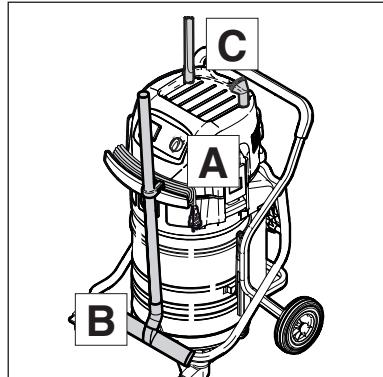EN 6 After finishing work**6.1 Switching the vacuum cleaner off and storage**

1. Switch off the cleaner and pull the mains plug out of the socket.
2. Wind up the power cord and hang it on the handle (A). Begin winding up the cord at the cleaner end and not the plug end to prevent the power cord from tangling up.
3. Empty the dirt tank and clean the vacuum cleaner.
4. After picking up liquids: Store the upper section of the vacuum cleaner separately so that the filter element can dry.
5. Hang the suction hose with the floor nozzle (B) in the brackets and pack the accessories (C) away.
6. Store the cleaner in a dry room where it is protected from unauthorized use.

7 Maintenance

7.1 Maintenance plan

ATTIX 961-01:

		After finishing work	When required
7.2.1	Emptying dirt tank	●	
7.2.3	Replacing the filter bag		●
7.2.6	Replacing filter element		●

ATTIX 965-21 SD XC:

		After finishing work	When required
7.2.2	Emptying dirt tank	●	
7.2.4	Replacing the disposal bag		●
7.2.6	Replacing filter element		●

ATTIX 963-21 ED XC:

		After finishing work	When required
7.2.5	Replacing the disposal bag		●
7.2.6	Replacing filter element		●

EN






7.2 Maintenance work

7.2.1 Emptying the dirt tank (ATTIX 961-01)

After emptying the tank: clean the rim of the tank and the seals in the intermediate ring and the upper section of cleaner before refitting them.

If the seal or groove is dirty or damaged, the suction performance will be reduced.

Before reinserting the suction hose: clean the inlet fitting and hose collar.

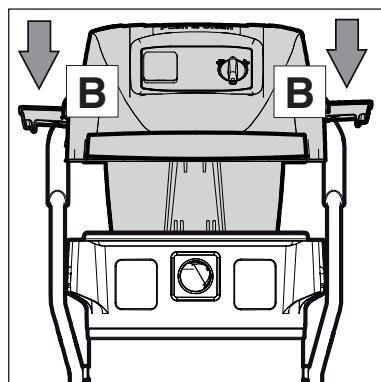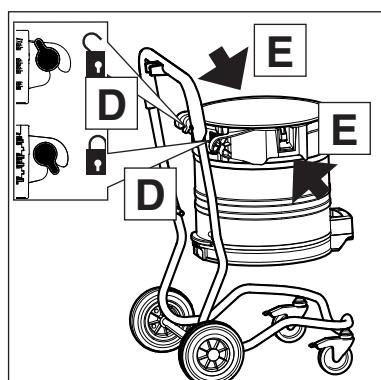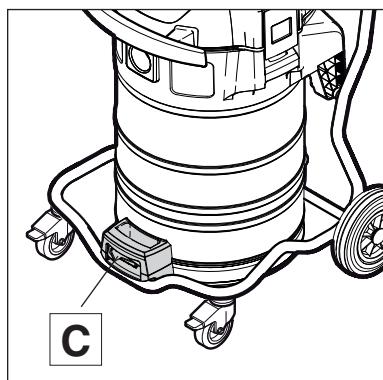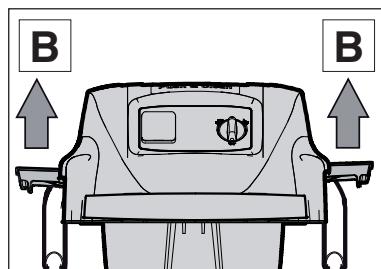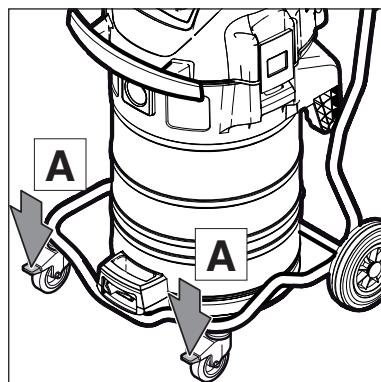

1. Switch off the vacuum cleaner and pull the mains plug out of the socket.
2. Apply parking brakes (A) on both castors.

3. Open the retaining clamps (B) and remove the upper section of the vacuum cleaner.

Tilting the dirt tank:

4. Pull the lever in the handle (C) upwards and tilt the tank.
5. Tip out the collected dirt.
6. Dispose of the dirt in accordance with legal regulations.


or

Removing the dirt tank:


4. Open the tank locks (D).
5. Use the handles (E) to lift the tank out of the frame.
6. Tip out the collected dirt.
7. Dispose of the dirt in accordance with legal regulations.
8. Place the empty tank in the frame and close the locks (D).
9. Attach the upper section of the vacuum cleaner.
10. Close the retaining clamps (B). Ensure that the retaining clamps fit properly.

EN

7.2.2 Emptying the dirt tank (ATTIX 965-21 SD XC)


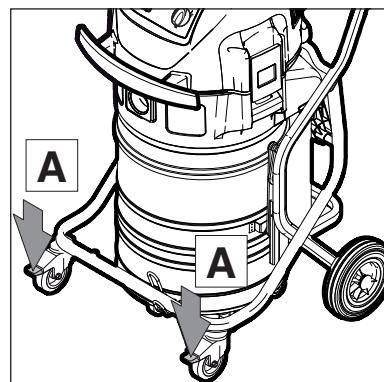


1. Switch off the vacuum cleaner and pull the mains plug out of the socket.
2. Apply parking brakes (A) on both castors.

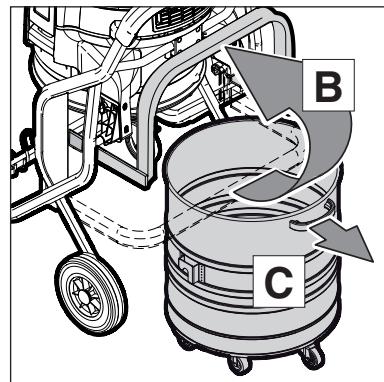

Removing the dirt tank:

3. Swing the bar (B) upwards.
4. Use the handle (C) to pull the dirt tank out of the vacuum cleaner.
5. Tipping out the collected dirt: **WARNING!** If heavy dirt has been picked up, never lift the dirt tank alone. Use the FORKLIFT (D), which is available as an accessory.
6. Use a crane or fork lift truck to position the FORKLIFT above the dirt tank.
7. Attach the tank to the accessory.
8. Dispose of the dirt in accordance with legal regulations.

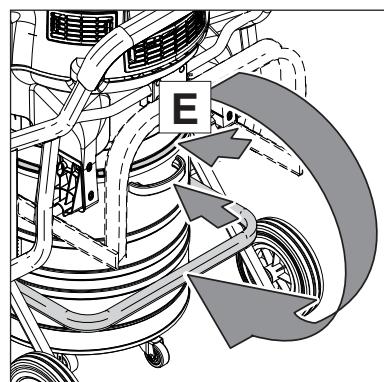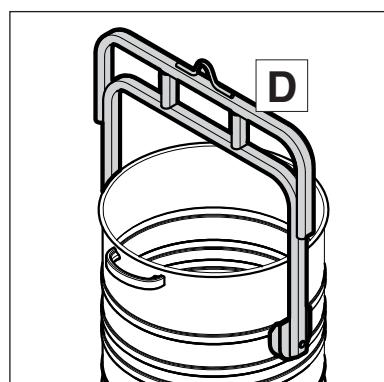






Inserting the dirt tank:

9. Clean the dirt tank.
10. Check the seals (E) between the tank and the upper section of the vacuum cleaner.
11. Push the dirt tank as far as possible into the vacuum cleaner.
12. Swing the bar (B) downwards without forcing it.

EN

7.2.3 Replacing the filter bag (ATTIX 961-01)

If the filter bag has heavy dirt, remove the bag by tilting the tank. See Section 7.2.1.

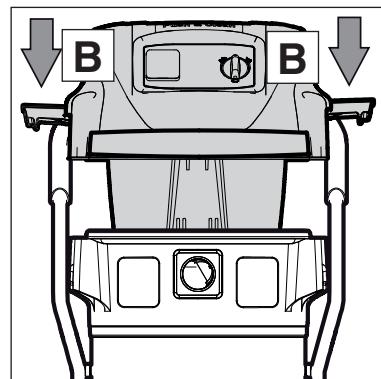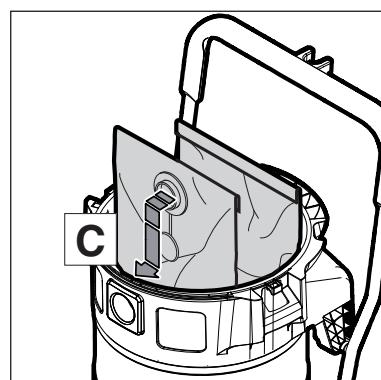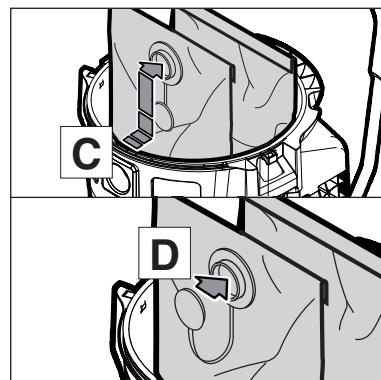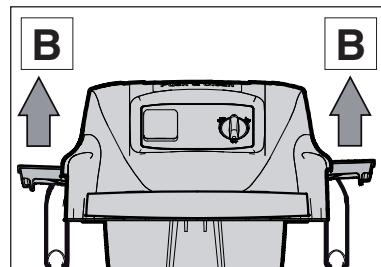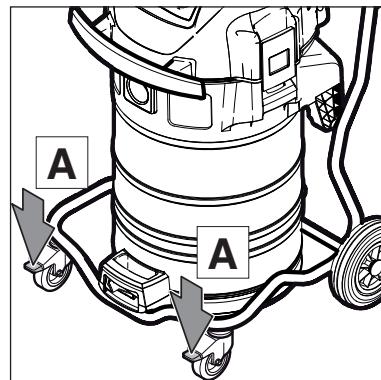

1. Switch off the vacuum cleaner and pull the mains plug out of the socket.
2. Apply parking brakes (A) on both castors.

3. Open the retaining clamps (B) and remove the upper section of the vacuum cleaner.

Removing the filter bag:

4. Carefully remove the filter bag connection from the inlet fitting (C).
5. Close the filter bag connection (1) with the hinged lid.
6. Dispose of the filter bag in accordance with legal regulations.







Inserting the filter bag:

7. Clean the dirt tank.
8. Insert the filter bag in the dirt tank.
9. Press the bush of the new filter bag firmly on to the inlet fitting (C).

10. Attach the upper section of the vacuum cleaner.
11. Close the retaining clamps (B). Ensure that the retaining clamps fit properly.

EN

7.2.4 Replacing the disposal bag (ATTIX 965-21 SD XC)

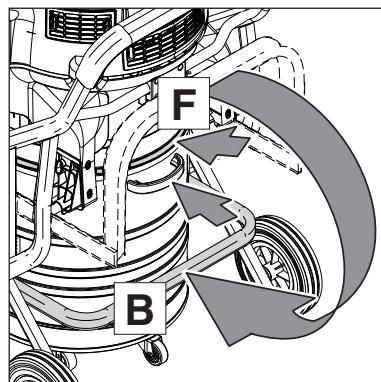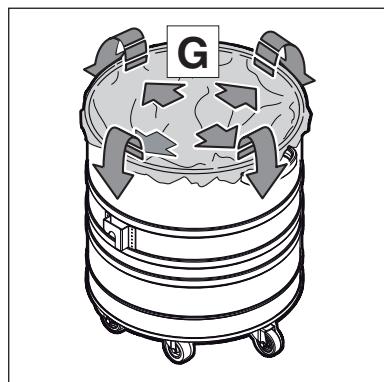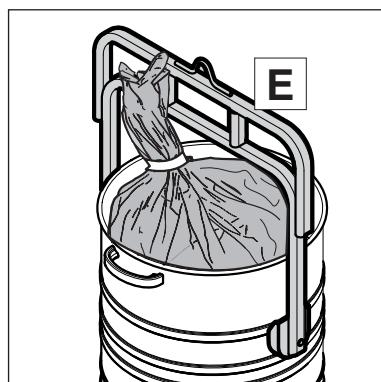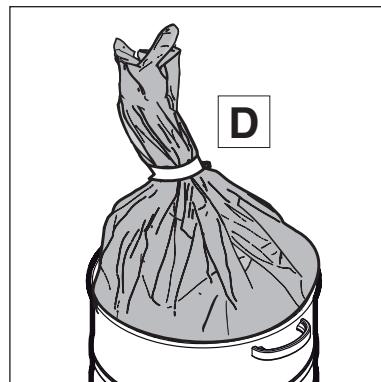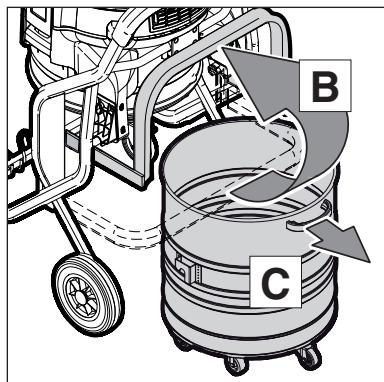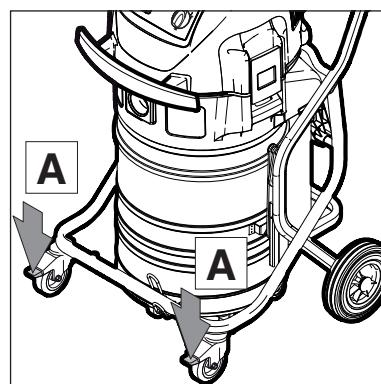

1. Switch off the vacuum cleaner and pull the mains plug out of the socket.
2. Apply parking brakes (A) on both castors.

Removing the disposal bag:

3. Swing the bar (B) upwards.
 4. Use the handle (C) to pull the dirt tank out of the vacuum cleaner.
 5. Close the disposal bag with string (D) and remove it from the dirt tank.
- WARNING!**
If heavy dirt has been picked up, never lift the dirt tank alone. Use the FORKLIFT (E), which is available as an accessory.
6. Use a crane or fork lift truck to position the FORKLIFT (E) above the dirt tank.
 7. Attach the tank to the accessory.
 8. Dispose of the dirt in accordance with legal regulations.


Inserting the disposal bag:

9. Clean the dirt tank.
10. Check the seals (F) between the tank and the upper section of the vacuum cleaner.
11. Insert the disposal bag (G) in the dirt tank.
12. Fold the top edge of the disposal bag over the rim of the dirt tank.
13. Push the dirt tank as far as possible into the vacuum cleaner.
14. Swing the bar (B) downwards without forcing it.



¹⁾ Optional accessories / Option depending on model
Original Instructions

EN

7.2.5 Replacing the disposal bag (ATTIX 963-21 ED XC)


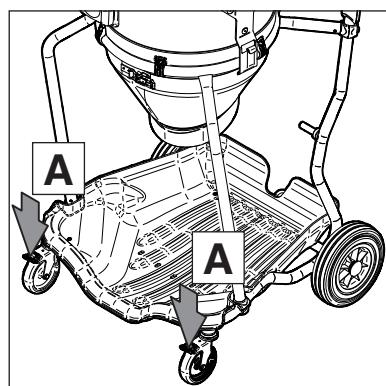


1. Switch off the vacuum cleaner and pull the mains plug out of the socket.
2. Apply parking brakes (A) on both castors.

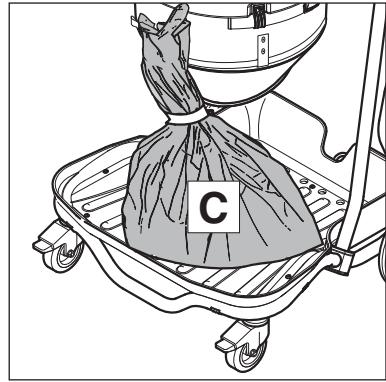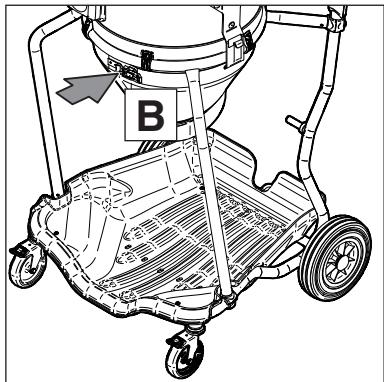


Remove the disposal bag:

3. Open clamping ring (B).
4. Detach the disposal bag (C) from the storage container and seal it.
5. Dispose of the dirt in accordance with legal regulations.

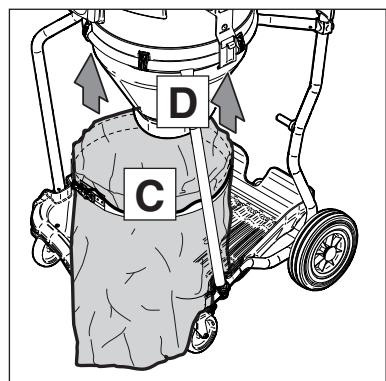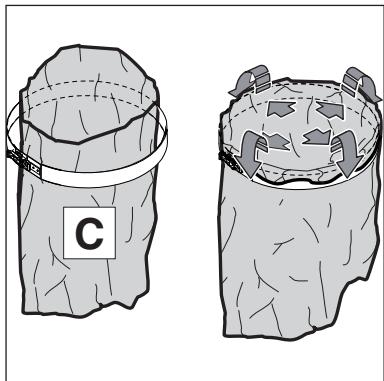

Inserting the disposal bag:

1. Insert disposal bag (C) into clamping ring.
2. Fold the top edge of the disposal bag over the rim of the clamping ring.
3. Attach the new disposal bag (C) onto the storage container (D).







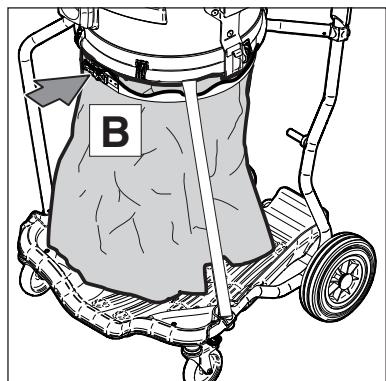


4. Close clamping ring (B).

EN

7.2.6 Replacing filter element

Never use the vacuum cleaner without a filter.

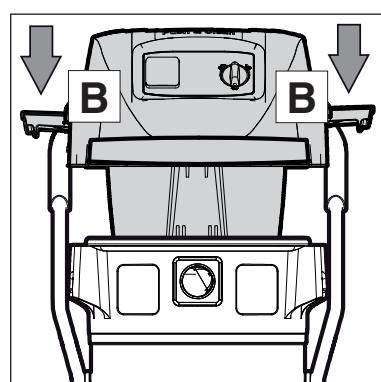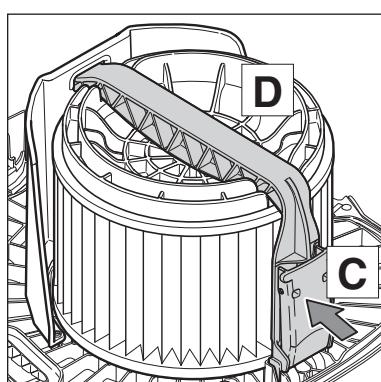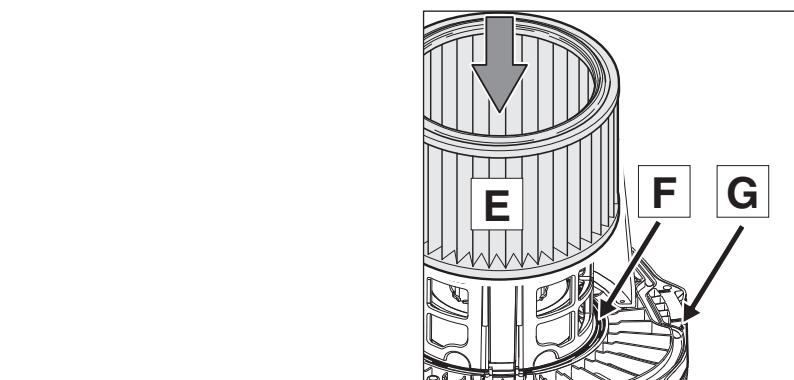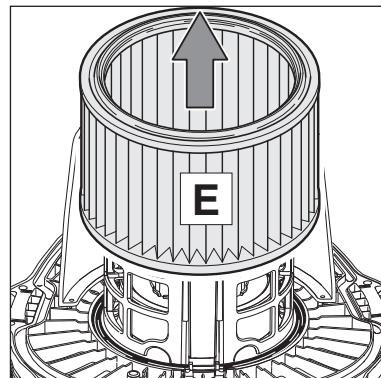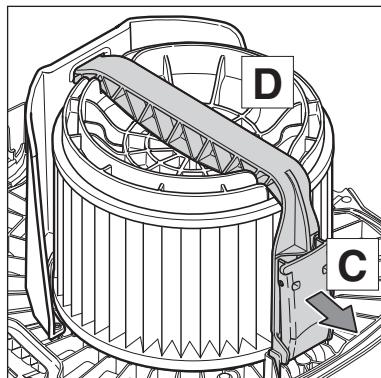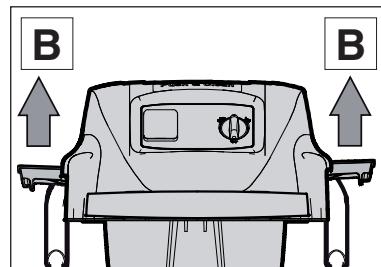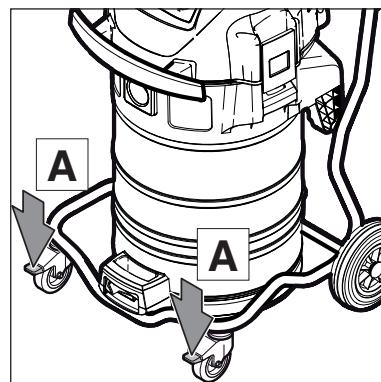

1. Switch off the vacuum cleaner and pull the mains plug out of the socket.
2. Apply parking brakes (A) on both castors.

3. Open the retaining clamps (B) and remove the upper section of the vacuum cleaner.

Removing the filter element:

4. Lay the upper section of the cleaner down with the filter element facing upwards.
5. Open the bar handle (C) and remove it.
6. Remove the filter holder (D).
7. Carefully remove the filter element (E).
8. Dispose of the used filter element in accordance with legal regulations.

Inserting the filter element:

9. Clean the filter seal (F). Check it for damage and replace it if necessary.
10. Check the antistatic pin (G) for damage. If necessary, have it replaced by Nilfisk Service.
11. Push new filter element (E) onto the filter holder.
12. Attach filter holder (D).
13. Attach bar (C) and close.
14. Attach the upper section of the vacuum cleaner.
15. Close the retaining clamps (B). Ensure that the retaining clamps fit properly.

¹⁾ Optional accessories / Option depending on model
Original Instructions



8 Troubleshooting

Fault	Cause	Remedy
✗ Motor does not start	<ul style="list-style-type: none"> > Fuse of the mains socket has blown. > Overload protection switch has tripped. > Motor is faulty. 	<ul style="list-style-type: none"> • Connect mains fuse. • Switch off the vacuum cleaner and allow it to cool for approx. 5 minutes. If the cleaner cannot be started again, contact the Nilfisk service department. • Have motor changed by Nilfisk Service.
✗ Motor does not run in automatic mode ¹⁾	<ul style="list-style-type: none"> > Power tool/pneumatic tool is defective or not connected properly. > The power rating of the electrical tool is too low. 	<ul style="list-style-type: none"> • Check that the power tool works or that the plug is inserted correctly. • Note that minimum power rating is P>40W
✗ Reduced suction power	<ul style="list-style-type: none"> > Suction power selected with suction power control is too low. > Clogged suction hose/nozzle. > Tank, disposal bag or filter bag is full. > Filter element is clogged. > Seal between tank and upper section of vacuum cleaner is faulty or missing. > Cleaning mechanism is defective. 	<ul style="list-style-type: none"> • Set suction power in accordance with section „Setting suction power“. • Clean suction hose/nozzle • See "Emptying tank" or "Replacing disposal bag, filter bag" sections. • See section „Cleaning filter element“ and „Replacing filter element“. • Replace seal. • Contact Nilfisk Service.
✗ No suction power during wet cleaning (ATTIX 961-01)	<ul style="list-style-type: none"> > Tank is full. 	<ul style="list-style-type: none"> • Switch off the cleaner. Empty the tank.
✗ Voltage fluctuations	<ul style="list-style-type: none"> > Impedance of power supply is too high. 	<ul style="list-style-type: none"> • Connect the cleaner to another socket closer to the fuse box. Voltage fluctuations over 7% should not occur if the impedance at the transfer point is $\leq 0.15 \Omega$.

9 Further information

9.1 Recycling the vacuum cleaner



1. Make the old cleaner unusable immediately.
2. Unplug the cleaner and cut the power cord.
3. Do not discard of electrical appliances with household waste.

As specified in European Directive 2012/19/EC on old electrical and electronic appliances, used electrical goods must be collected separately and recycled ecologically.

Contact your local authorities or your nearest dealer for further information.

9.2 Guarantee

Our general conditions of business are applicable with regard to the guarantee.

Subject to change as a result of technical advances.

9.3 Tests and approvals

Electrical tests must be performed in accordance with the provisions of safety regulations (VBG4) and to DIN VDE 0701 Part 1 and Part 3. In accordance with DIN VDE 0702 these tests must be performed at regular intervals and after repairs or modifications.

The vacuum cleaner has been approved in accordance with IEC/EN 60335-2-69.

9.4 EU Declaration of Conformity



EU / UE / EL / EC / EE / ES / EU / AB

		nimetatud toode on kooskõlas järgmiste direktiividile											
		wymieniony produkt jest zgodny z następującymi dyrektywami i normami..											
EN	Declaration of Conformity												
RO	Nilfisk declară sous notre seule responsabilité que le produit mentionné ci-dessus est conforme aux directives et normes suivantes.												
FR	Deklaracija za sъответствие	Deklaracija de conformidade	Declaração de conformidade	Deklaracija o godnosti	Declaratie de conformitate	Декларация о соответствии	Declaratia o corespondere	Deklaracija om sъответствие	Deklaration de conformidad	Declaracion de conformidad	Vastavuodeklaratsioon	Declaración de conformidad	Vastavuodenmukaisuusvakuutus
FI	Megfelelősségi nyilatkozat	Megfelelősségi nyilatkozat	Iżava o sukladnosti	Iżava o sukladnosti	Deklaracija o sъответствии	Forsäkring om överensstämmelse	Deklaracija o sъответствии	Forsäkring om överensstämmelse	Attestation de déclaration	Attestation de déclaration	Vyhášenie o zhode	Vyhášenie o zhode	Izjava o skladnosti
BG	Samsvarserklæring	Samsvarserklæring	Conformitetsverklaring	Uygunluk beyanı									
EL	Manufacturer / Výrobce / Hersteller / Fabrikant / Fabricante / Kartotekuotris / Gyártó / Proizvođač / Fabricante / Gaminėtojas / Ražotājs / Produsent / Fabrikant / Fabricante / Producent / Produktant / producent / Tillverkaren / Výrobca / Proizvajalec / Üretici firma:	Nilfisk A/S, Kornmarksvej 1	DK-2605 Brøndby, DENMARK										
TR	Product / Produkt / Product / Toote / Produkt / Produktas / Produkts / Artikels / Produkta / Produs / Produs / Ízdelek / Úrűin	ATTIX 961-01, ATTIX 965-21 SD XC											
HR	Description / Popis / Beschreibung / Beskrivelse / Description / Krijeđost / Leirás / Opis / Descrizione / Aprasymas / Apraksts / Beschrifitung / Descruição / Descriere / Beskrivning / Popis / Açıklama	VAC - Commercial - Wet/Dry	VAC - Commercial - Wet/Dry	220-240V, 110-120V 50/60Hz, IPX4									
IT	We, Nilfisk hereby declare under our sole responsibility, that the above-mentioned product(s) is/are in conformity with the following directives and standards.												
LT	Mes „Nilfisk pareiškiu vienasiūliskos ataskomybės, kad pirmiu minėtus produktais atitinkanti šios direktyvas ir standartai	2006/42/EC	EN 6033-5-1:2012-A11:2014										
LV	Mēs Nilfisk šo aplieciņu ar pilnu atbilstību, ka iepriekš minētās produktais atbilst šādām direktīvām un standartie	2014/30/EU	EN 6033-2-69:2012										
NO	Vi, Nilfisk erkærer hermed under eget ansvar med ovennævnte produkter til i samvar med følgende direktiver og standarter	NO	EN 55014-1:2017										
NL	We verklaren Nilfisk hierbij op eigen verantwoordelijkheid, dat het bovengenoemde product voldoet aan de volgende richtlijnen en normen	DE	EN 55014-2:2015										
PT	Nósotros, Nilfisk declaramos bajo nuestra única responsabilidad que el producto antes mencionado está en conformidad con las siguientes directivas y normas	DA	EN 61000-3-2:2014										
ES	Meine, Nilfisk Käesolevaga kinnitame la kannanne ainusikulist vastutust, et eespool	ES	EN 61000-3-3:2013										
PL	Lars Gjødsbøl, Executive Vice President Global Products & Services	ET											

9.5 Technical data



ATTIX 9				
		961-01	965-21 SD XC	963-21 ED XC
Voltage	V	230 (EU,CH,GB) 110 (GB)	230 (DK,EU) 240 (AU)	230 (DK,EU) 110 (GB)
Mains frequency	Hz		50/60	
Fuse	A	10 (CH) 13 (GB 230V) 16 (EU) 32 (GB 110 V)	10 (DK, AU) 16 (EU)	10 (DK) 16 (EU) 32 (GB 110 V)
Power consumption _{IEC}	W	2x1200 (EU,GB) 2x1000(CH, GB 110V)	2x1200 (EU) 2x1000(DK, AU)	2x1200 (EU) 2x1000(DK,GB)
Connected load for appliance socket	W		1200 (EU) 300 (DK) 400 (AU)	1200 (EU) 300 (DK) 750 (GB)
Total connected load	W	2400 (EU,GB) 2000 (CH, GB 110V)	3600 (EU) 2300 (DK) 2400 (AU)	3600 (EU) 2300 (DK) 2750 (GB)
Air flow rate	m ³ /h l/min	2x216 (EU,GB) / 2x174 (CH, GB 110V) 2x3600 (EU,GB) / 2x2900 (CH, GB 110V)	2x216 (EU) / 2x174 (DK, AU) 2x3600 (EU) / 2x2900 (DK, AU)	2x216 (EU) / 2x174 (DK, GB) 2x3600 (EU) / 2x2900 (DK, GB)
Vacuum	hPa/mbar kPa		230 (EU, GB) / 210 (DK, CH GB 110V) 23 (EU,GB) / 21 (DK, CH GB 110V, AU)	
Sound pressure level at a distance of 1 m, EN 60704-1	dB(A)		70 ± 2	
Working sound pressure level	dB(A)		67 ± 2	
Vibration ISO 5349	m/s ²		≤ 2,5	
Power cord: Length	m		10 (EU, CH, GB, DK) 7,5 (AU)	
Power cord: Type			H07RN-F3G1,0 mm ² (CH,DK) H07RN-F3G1,5 mm ² (EU, GB 230 V) H07BQ-F3G2,5 mm ² (GB 110 V) H05RR-F3G1,5mm ² (AU)	
Protection class			I	
Type of protection (splash water protected)			IP X4	
Radio interference level			EN 55014-1	
Tank volume	l	70	50	30
Width	mm	610	640	620
Depth	mm	645	725	605
Height	mm	985	1020	1200
Weight	kg	36	42	30

9.6 Optional accessories

Description	Order No.
Filter bag (5 pcs.) ATTIX 961-01	302002892
Disposal bag (5 pcs.) ATTIX 965-21 SD XC	302001480
Disposal bag (24 pcs.) ATTIX 963-21 ED XC	302003723
Filter element	107400562
Cloth insert filter ATTIX 961-01, ATTIX 965-21 SD XC	302002894
Nilfisk-Foam-Stop (6 x 1 l) ATTIX 961-01, ATTIX 965-21 SD XC	8469

¹⁾Optional accessories / Option depending on model
Original Instructions



HEAD QUARTER DENMARK

Nilfisk A/S
Kornmarksvej 1
DK-2605 Broendby
Tel.: (+45) 4323 8100
www.nilfisk.com

SALES COMPANIES

ARGENTINA

Nilfisk Argentina
Herrera 1855 Piso 4° B Ofic 405
Ciudad de Buenos Aires
Tel.: (+54) 11 6091 1576
www.nilfisk.com.ar

AUSTRALIA

Nilfisk Pty Ltd
Unit 1/13 Bessemer Street
Blacktown NSW 2148
Tel.: (+61) 2 98348100
www.nilfisk.com.au

AUSTRIA

Nilfisk GmbH
Metzgerstrasse 68
5101 Bergheim bei Salzburg
Tel.: (+43) 662 456 400 90
www.nilfisk.at

BELGIUM

Nilfisk n.v.s.a.
Riverside Business Park
Boulevard Internationaleaan 55
Bâtiment C3/C4 Gebouw
Bruxelles 1070
Tel.: (+32) 24 67 60 50
www.nilfisk.be

BRAZIL

Nilfisk do Brasil
Av. Eng. Luis Carlos Berrini, 550
40 Andar, Sala 03
SP - 04571-000 Sao Paulo
Tel.: (+11) 3959-0300 / 3945-4744
www.nilfisk.com.br

CANADA

Nilfisk Canada Company
240 Superior Boulevard
Mississauga, Ontario L5T 2L2
Tel.: (+1) 800-668-8400
www.nilfisk.ca

CHILE

Nilfisk S.A. (Comercial KCS Ltda)
Salar de Llamara 822
8320000 Santiago
Tel.: (+56) 2684 5000
www.nilfisk.cl

CHINA

Nilfisk
4189 Yindu Road
Xinzhuan Industrial Park
201108 Shanghai
Tel.: (+86) 21 3323 2000
www.nilfisk.cn

CZECH REPUBLIC

Nilfisk s.r.o.
VGP Park Horní Počernice
Do Čertous 1/2658
193 00 Praha 9
Tel.: (+420) 244 090 912
www.nilfisk.cz

DENMARK

Nilfisk Danmark A/S
Industrievej 1
Hadsund, DK-9560
Tel.: 72 18 21 20
www.nilfisk.dk

FINLAND

Nilfisk Oy Ab
Koskelontie 23 E
02920 Espoo
Tel.: (+358) 207 890 600
www.nilfisk.fi

FRANCE

Nilfisk SAS
26 Avenue de la Baltique
Villebon sur Yvette
91978 Courtabœuf Cedex
Tel.: (+33) 169 59 87 00
www.nilfisk.fr

GERMANY

Nilfisk GmbH
Guido-Oberdorfer-Straße 2-10
89287 Bellenberg
Tel.: (+49) (0)7306/72-444
www.nilfisk.de

GREECE

Nilfisk A.E.
Αναπταύσεως 29
Κορωπί Τ.Κ. 194 00
Tel.: (30) 210 9119 600
www.nilfisk.gr

HOLLAND

Nilfisk B.V.
Versterkerstraat 5
1322 AN Almere
Tel.: (+31) 036 5460760
www.nilfisk.nl

HONG KONG

Nilfisk Ltd.
2001 HK Worsted Mills
Industrial Building
31-39, Wo Tong Tsui St.
Kwai Chung, N.T.
Tel.: (+852) 2427 5951
www.nilfisk.com

HUNGARY

Nilfisk Kft.
II. Rákóczi Ferenc út 10
2310 Szigetszentmiklós-Lakihegy
Tel.: (+36) 24 475 550
www.nilfisk.hu

INDIA

Nilfisk India Limited
Pramukh Plaza, 'B' Wing, 4th floor,
Unit No. 403
Cardinal Gracious Road, Chakala
Andheri (East) Mumbai 400 099
Tel.: (+91) 22 6118 8188
www.nilfisk.in

IRELAND

Nilfisk
1 Stokes Place
St. Stephen's Green
Dublin 2
Tel.: (+35) 3 12 94 38 38
www.nilfisk.ie

ITALY

Nilfisk SpA
Strada Comunale della Braglia, 18
26862 Guardamiglio (LO)
Tel.: (+39) (0) 377 414021
www.nilfisk.it

JAPAN

Nilfisk Inc.
1-6-6 Kita-shinyokohama, Kouhoku-ku
Yokohama, 223-0059
Tel.: (+81) 45548 2571
www.nilfisk.com

MALAYSIA

Nilfisk Sdn Bhd
Sd 33, Jalan KIP 10
Taman Perindustrian KIP
Sri Damansara
52200 Kuala Lumpur
Tel.: (60) 3603 627 43 120
www.nilfisk.com

MEXICO

Nilfisk de Mexico, S. de R.L. de C.V.
Pirineos #515 Int.
60-70 Microparque
Industrial WSantiago
76120 Queretaro
Tel.: (+52) (442) 427 77 00
www.nilfisk.com

NEW ZEALAND

Nilfisk Limited
Suite F, Building E
42 Tawa Drive
0632 Albany Auckland
Tel.: (+64) 9 414 1996
Website: www.nilfisk.com

NORWAY

Nilfisk AS
Bjørnerudveien 24
1266 Oslo
Tel.: (+47) 22 75 17 80
www.nilfisk.no

PERU

Nilfisk S.A.C.
Calle Boulevard 162, Of. 703, Lima
33- Perú
Lima
Tel.: (511) 435-6840
www.nilfisk.com

POLAND

Nilfisk Sp. Z.O.O.
Millenium Logistic Park
ul. 3 Maja 8, Bud. B4
05-800 Pruszków
Tel.: (+48) 22 738 3750
www.nilfisk.pl

PORTUGAL

Nilfisk Lda.
Sinha Business Park
Zona Industrial Da Abrunheira
Edificio 1, 1º A
P2710-089 Sintra
Tel.: (+351) 21 911 2670
www.nilfisk.pt

RUSSIA

Nilfisk LLC
Vyatskaya str. 27, bld. 7/1st
127015 Moscow
Tel.: (+7) 495 783 9602
www.nilfisk.ru

SINGAPORE

Den-Sin
22 Tuas Avenue 2
639453 Singapore
Tel.: (+65) 6268 1006
www.densin.com

SLOVAKIA

Nilfisk s.r.o.
Bancíkovej 1/A
SK-821 03 Bratislava
Tel.: (+421) 910 222 928
www.nilfisk.sk

SOUTH AFRICA

Nilfisk (Pty) Ltd
Kimbult Office Park
9 Zeiss Road
Laser Park
Honeydew
Johannesburg
Tel: +27118014600
www.nilfisk.co.za

SOUTH KOREA

Nilfisk Korea
#204 2F Seoulup Kolon Digital
Tower
25 Seongsuil-ro 4-gil, Seongdong-gu
Seoul.
Tel.: (+ 82) 2 3474 4141
www.nilfisk.co.kr

SPAIN

Nilfisk S.A.
Torre d'Ara,
Passeig del Rengle, 5 Plta. 10^a
08302 Mataró
Tel.: (34) 93 741 2400
www.nilfisk.es

SWEDEN

Nilfisk AB
Tallegårdsgatan 4
431 53 Mölndal
Tel.: (+46) 31 706 73 00
www.nilfisk.se

SWITZERLAND

Nilfisk AG
Ringstrasse 19
Kircheberg/Industri Stelz
9500 Wil
Tel.: (+41) 71 92 38 444
www.nilfisk.ch

TAIWAN

Nilfisk Ltd
Taiwan Branch (H.K)
No. 5, Wan Fang Road
Taipei
Tel.: (+88) 6227 00 22 68
www.nilfisk.tw

THAILAND

Nilfisk Co. Ltd.
89 Soi Chokechai-Ruammitr
Viphavadee-Rangsit Road
Lad Yao, Jatuchak, Bangkok 10900
Tel.: (+66) 2275 5630
www.nilfisk.co.th

TURKEY

Nilfisk A.S.
Serifli Mh. Bayraktar Bulv. Sehit
Sk. No:7
Ümraniye, 34775 Istanbul
Tel.: +90 216 466 94 94
www.nilfisk.com.tr

UNITED ARAB EMIRATES

Nilfisk Middle East Branch
SAIF-Zone
P.O. Box 122298
Sharjah
Tel.: (+971) (0) 655-78813
www.nilfisk.com

UNITED KINGDOM

Nilfisk Ltd.
Nilfisk House, Bowerbank Way
Giwilly Industrial Estate, Penrith
Cumbria CA11 9BQ
Tel: (+44) (0) 1768 868995
www.nilfisk.co.uk

UNITED STATES

Nilfisk, Inc.
9435 Winnetka Ave N,
Brooklyn Park
MN- 55445
www.nilfisk.com

VIETNAM

Nilfisk Vietnam
No. 51 Doc Ngu Str.
P. Vinh Phúc, Q.Ba Dinh
Hanoi
Tel.: (+84) 761 5642
www.nilfisk.com

