



HD 4/11 C Bp Pack

First battery-operated professional high-pressure cleaner HD 4/11 C Battery. For mobile applications, like, e.g. in the municipal area or in landscaping. Incl. 2x 36 V lithium-ion batteries.



1 36 V battery platform

- High cleaning performance and long runtimes.
- Compatible batteries across several ranges.

2 Economical and efficient eco!efficiency mode

- Saves energy and extends the runtime of the battery.
- Reduced cleaning performance for lighter dirt.

3 Quality

- The automatic pressure relief protects the components and extends the service life.
- High-quality brass cylinder head.

4 Mobility

- The integrated carrying handle on the front of the machine enable easy loading and convenient transport.
- Push handle can be retracted at the push of a button.



HD 4/11 C Bp Pack

- Independent high-pressure cleaning irrespective of external power sources
- High cleaning performance with long runtime
- Two powerful 36 V lithium-ion batteries included in the scope of supply

Technical data

Order no.	1.520-926.0	
EAN code	4054278355306	
Battery platform	36 V battery platform	
Flow Rate	l/h	320 - 400
Operating pressure	bar / MPa	70 - 110 / 7 - 11
Max. Pressure	bar / MPa	150 / 15
Water feed temperature	°C	60
number of simultaneous users	1	
Mobility	cart	
Power rating	KW	1,6
Battery type	Lithium-ion replacement battery	
Voltage	V	36
Capacity	Ah	7,5
Number of batteries required	piece(s)	2
Runtime per battery charging	min.	30 (7.5 Ah) /
Battery charging time with fast charger 80%/100%	min.	58 / 81
Charging current	A	6
Power supply for battery charger	V / Hz	100 - 240 / 50 - 60
Cable length of battery charger	m	1,2
Weight	kg	26,37
Dimensions (L x W x H)	mm	380 x 370 x 930

Equipment

Trigger gun	EASY!Force	
High-pressure hose	m	10
Spray lance	mm	840
Triple nozzle (0°/25°/40°)	manual	
Dirt Blaster spray lance	■	
ANTI!Twist	-	

■ Included in delivery.

HD 4/11 C BP PACK 1.520-926.0




		Order no.						Price	Description	
Batteries										
Battery Power+ 36/75	1	2.445-043.0								<input checked="" type="checkbox"/>
Battery Power+ 36/60	2	2.042-022.0								<input type="checkbox"/>
Battery chargers										
Fast battery recharger Battery Power+ 36/60	3	2.445-047.0								<input checked="" type="checkbox"/>

Included in delivery.
 Available accessories.

HD 4/11 C BP PACK 1.520-926.0

KÄRCHER

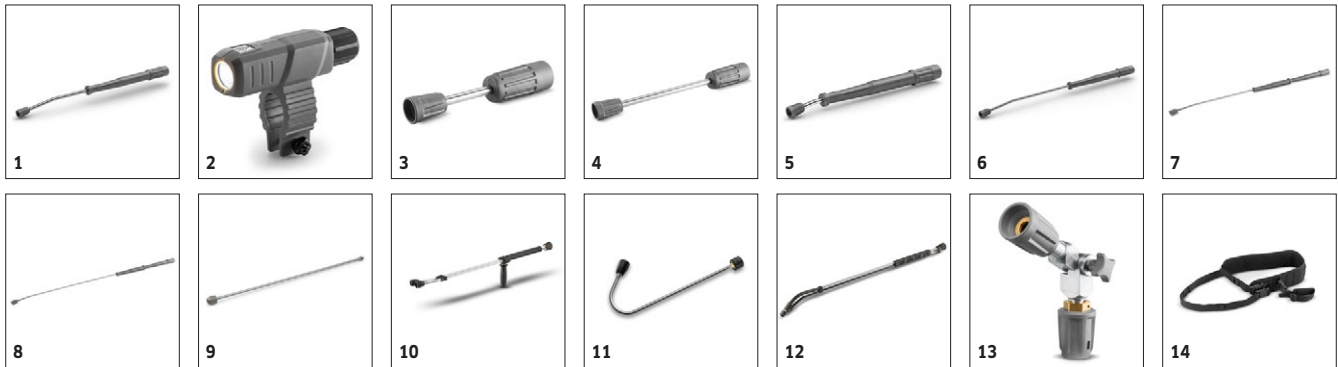

		Order no.	Max. working pressure	Length		Price	Description	
Rotating spray lances								
Spray lance	1	4.112-006.0	300 bar	840 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
LED nozzle light	2	2.680-002.0					LED work light for assembly on EASY!Force spray lances, providing a clear view in poor lighting conditions ensuring controlled cleaning results.	□
Spray lance	3	4.112-027.0	300 bar	250 mm			250 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	4	4.112-024.0	300 bar	400 mm			400 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	5	4.112-007.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	6	4.112-000.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	7	4.112-018.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	8	4.112-021.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance extender	9	4.112-048.0	300 bar	1000 mm			Spray lance extension with EASY!Lock connection. Length 1000 mm.	□
Double lance								
Double lance	10	2.112-016.0	310 bar	960 mm			960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	□
Angular spray lance								
WC and gutter lance	11	4.112-029.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance								
Flexible lance	12	4.112-035.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
High pressure articulated joint	13	4.112-057.0	300 bar				For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	□
Telescopic spray lance								
Restraint belt for telescopic jet pipe	14	6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	□
Gutter cleaner								
Gutter cleaning lance	15	2.112-015.0		960 mm			The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	□
Undercarriage spray lance								
Underbody lance	16	4.112-032.0		700 mm			Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	□

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0



17



18

		Order no.	Max. working pressure	Length			Price	Description	
Additional handle									
Additional handle for EASY!Lock spray lances	17	4.321-380.0						Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	<input type="checkbox"/>
PowerControl spray lance									
Pressure regulating jet pipe packaged Po	18	4.112-043.0							<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK

1.520-926.0



2

		Order no.	Max. working pressure	Nozzle size			Price	Description	
Dirt Blaster, small									
Dirt Blaster Nozzle	1	4.114-056.0	180 bar	28					■
Triple nozzles									
Triple Nozzle	2	4.117-024.0	300 bar	28				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application.	■

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0

KÄRCHER



		Order no.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides								
High-pressure hose	1	6.110-034.0	DN 6	250 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar.	<input checked="" type="checkbox"/>
	2	6.110-035.0	DN 6	250 bar	10 m			<input type="checkbox"/>
	3	6.110-056.0	DN 6	300 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink protection. NW 6/155°C/300 bar	<input type="checkbox"/>
	4	6.110-031.0	DN 8	315 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
	5	6.110-030.0	DN 8	315 bar	15 m		15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
	6	6.110-032.0	DN 8	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
	7	6.110-014.0	DN 8	315 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
	8	6.110-042.0	DN 10	220 bar	15 m		15 m high-pressure hose (M 22 x 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	<input type="checkbox"/>
	9	6.110-043.0	DN 10	220 bar	20 m		with union on both sides, M 22 x 1.5 with anti-kink protection. NW 10/155°C/220 bar	<input type="checkbox"/>
	10	6.110-044.0	DN 10	220 bar	25 m			<input type="checkbox"/>
	11	6.110-045.0	DN 10	220 bar	40 m			<input type="checkbox"/>
	12	6.110-059.0	DN 12	210 bar	15 m		High-pressure hose for water volumes greater than 1,800 l/h. With union on both sides. 2x M 22 x 1.5 with anti-kink protection.	<input type="checkbox"/>
	13	6.110-060.0	DN 12	210 bar	40 m			<input type="checkbox"/>
	14	6.110-041.0	DN 10	220 bar	10 m			<input type="checkbox"/>
Longlife 400 with unions on both sides								
High-pressure hose Longlife	15	6.110-024.0	DN 8	400 bar	1,5 m		1,5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	<input type="checkbox"/>
	16	6.110-069.0	DN 8	400 bar	1,5 m		High-pressure hose (ID 8) with double steel reinforcement. 1,5 m long, suitable for up to 400 bar pressure. Connectors: M 22 x 1.5, quick and convenient EASY!Lock hand screw connection.	<input type="checkbox"/>
	17	6.110-038.0	DN 8	400 bar	10 m		Durable, 10 m long high-pressure hose (ID 8) with double steel reinforcement and EASY!Lock hand screw connection at both ends and ANTI!Twist. Approved for 400 bar pressure.	<input type="checkbox"/>
	18	6.110-023.0	DN 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
	19	6.110-027.0	DN 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
	20	6.110-029.0	DN 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
Food industry version with unions on both sides								
High-pressure hose food grade	21	6.110-063.0	DN 6	250 bar	15 m		15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	<input type="checkbox"/>
	22	6.110-051.0	DN 8	250 bar	10 m		10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve.	<input type="checkbox"/>
	23	6.110-052.0	DN 8	250 bar	20 m		20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0



		Order no.	ID	Max. working pressure	Length	Price	Description	
Longlife food industry version with unions on both sides								
High-pressure hose food grade Longlife	24	6.110-053.0	DN 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5	<input type="checkbox"/>
	25	6.110-054.0	DN 8	400 bar	20 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0



		Order no.	Nozzle size				Price	Description	
Power nozzle spray angle 15°									
Power Nozzle	1	2.113-041.0	28						<input type="checkbox"/>

■ Included in delivery. Available accessories.

HD 4/11 C BP PACK

1.520-926.0

KÄRCHER



		Order no.	Max. working pressure	Nozzle size	Diame-ter		Price	Description	
Pipe cleaning hose, ID 6									
Hose assembly TR pipe cleaning DN6 max.2	1	6.110-046.0	250 bar					The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	2	6.110-008.0	250 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	3	6.110-047.0	250 bar					The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 14MPa	4	6.110-048.0	140 bar					10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose	5	6.110-049.0	140 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m	6	6.110-050.0	140 bar					30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning nozzle									
Dirt blaster pipe cleaning D21/040	7	4.765-001.0		40	21 mm			The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Dirt blaster pipe cleaning D30/040	8	4.765-004.0		40	30 mm				<input type="checkbox"/>
Drum and tank cleaning									
Add-on kit mud sucker	9	2.641-798.0							<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0



		Order no.	Flow Rate	Nozzle size	Diame- ter	Price	Description	
Hard surface cleaner FR 30								
FR 30 Surface Cleaner	1	2.111-011.0			300 mm		Up to 10 times greater area coverage compared with the conventional high pressure jet.	<input type="checkbox"/>
Hard surface cleaner FR 30 ME								
FR 30 ME surface cleaner	2	2.111-013.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Machine-specific nozzle kit for FR								
Nozzle kit for surface cleaners	3	2.641-457.0	400 - 450 l/h				Machine-specific nozzle kit comprising power nozzles and screw connections. For the optimal performance of Kärcher surface cleaners (500 to 650 l/h).	<input type="checkbox"/>
Nozzle kit for surface cleaners (type-specific) 450 - 500 l/h	4	2.640-482.0	450 - 500 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h).	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0

KÄRCHER



		Order no.	Flow Rate				Price	Description	
Cup foam lance									
Cup foam lance Basic 1	1	4.112-053.0	350 - 600 l/h					For high-pressure cleaners with a flow rate of 350-600 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent.	<input type="checkbox"/>
Bottle cleaning agents 1L	2	5.071-414.0							<input type="checkbox"/>
Cup foam lance Advanced 042	3	2.112-018.0						Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
Tank grey only for replacement 1L	4	6.414-050.0						Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	<input type="checkbox"/>
Foam lance Advanced 1	5	4.112-063.0	400 - 600 l/h						<input type="checkbox"/>
Foam lance DUO Advanced TR	6	4.112-067.0	400 - 600 l/h						<input type="checkbox"/>
Inno Foam Set									
Inno foam kit with detergent injector	7	2.112-000.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	8	2.112-010.0						HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 055 z. Inno/Easy Set 500 - 600 l/h	9	2.111-009.0	500 - 600 l/h					Optimal adaptation to different machine outputs for economic use.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle kit	10	2.112-013.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0

KÄRCHER




		Order no.	Length				Price	Description	
Automatic, self-winding hose reels									
Wall-mounted hose reel	1	2.639-257.0	15 m						<input type="checkbox"/>
Add-on kit hose reel plastics	2	6.392-074.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	3	6.392-083.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Hose reel, automatic, 20 m, painted	4	6.392-106.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Hose reel, automatic, basalt grey-coated	5	6.392-105.0	20 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	6	6.392-076.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS hose reel stainless steel	7	6.392-122.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>
Add-on kit hose reel TR 40m	8	6.392-442.0	40 m					Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	<input type="checkbox"/>
Swivel holder	9	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
ABS wall fastening stainless steel	10	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK

1.520-926.0

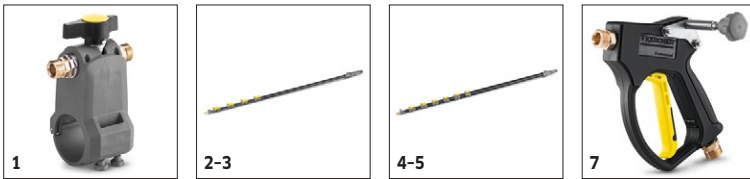

		Order no.	Flow Rate	Water feed temperature	Length	Length	Price	Description	
Telescopic									
TL low pressure adapter	1	4.580-097.0		max. 40 °C				TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	<input type="checkbox"/>
Telescopic lance TL 7 F	2	4.762-609.0		max. 60 °C				Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	<input type="checkbox"/>
Telescopic lance TL 7 H	3	4.762-610.0		max. 60 °C				Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	<input type="checkbox"/>
Telescopic lance TL 10 H	4	4.762-611.0		max. 60 °C				Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	<input type="checkbox"/>
Telescopic lance TL 10 C	5	4.762-612.0		max. 60 °C				Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	<input type="checkbox"/>
Telescopic lance TL 14 C	6	4.762-613.0		max. 60 °C				Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	<input type="checkbox"/>
TL high pressure adapter	7	4.775-154.0		max. 60 °C				TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0



		Order no.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.115-000.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.115-006.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle pack for wet blasting attachment									
Nozzle pack TR wet jet set 0035	3	2.112-021.0	35					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.115-000.0 4.115-006.0.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

HD 4/11 C BP PACK 1.520-926.0



		Order no.	Flow Rate				Price	Description	
Push-on washing brush									
Push-on washing brush	1	4.762-497.0						With clamp for mounting directly to units' double or triple nozzle. Fits on new double and triple nozzles.	<input type="checkbox"/>
Push-on wash brush, M 18 x 1.5	2	4.113-001.0						Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	<input type="checkbox"/>
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, nylon bristles	3	4.113-004.0	500 - 800 l/h					The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 x 1.5, replaceable brush insert).	<input type="checkbox"/>
Rotating wash brush for < 800 l/h machines, natural bristles	4	4.113-003.0	500 - 800 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.