



NT 35/1 Tact Bs

Handy, highly absorbent one-engined wet/dry vacuum cleaner with innovative, patented, auto filter clean system - TACT - and with a container volume of 35 l for all applications in the bakery and confectionery craft. The special PES flat pleated filter system allows changing between wet and dry vacuuming without filter change. The unit will be delivered without accessories. The NT 35/1 Tact Bs is serially equipped with an antistatic system up to the suction hose connection, accessory holder for the storage of baking oven nozzle or the baker's kit (both special accessories) with heat resistant container and rubber power cord.

1 The vacuum cleaner for bakeries

- The plastic container is acid, lye and heat resistant.
- The optional accessory kits were developed specially for use in bakeries.

2 Heat-resistant PES flat pleated filter

- The machine has a heat-resistant PES flat pleated filter, dust class M - ideal for effortless removal of dust and dirt in bakeries.



NT 35/1 Tact Bs

- Antistatic preparation
- Tact automatic filter cleaning system
- Accessory holder for oven nozzle

Technical data

Order no.	1.184-700.0	
EAN code	4039784722668	
Air flow rate	l/s	61
Vacuum	mbar / kPa	230 / 23
Container capacity	l	35
Max. rated input power	W	1380
Standard nominal width		35
Cable length	m	7.5
Sound pressure level	dB(A)	63
Weight	kg	12.8
Dimensions (L × W × H)	mm	580 × 380 × 580

Equipment


Flat pleated filter		PES
Automatic switch-off at max. filling quantity		■
Antistatic system		■
Container material		plastic
Eco filter system		■
Heat-resistant plastic container		■
Filter cleaning		Tact filter cleaning system
Safety class		I
Steering roller stop		■
Maintenance-free suction turbines	piece(s)	1

■ Included in the scope of supply.

NT 35/1 TACT BS

1.184-700.0

KÄRCHER

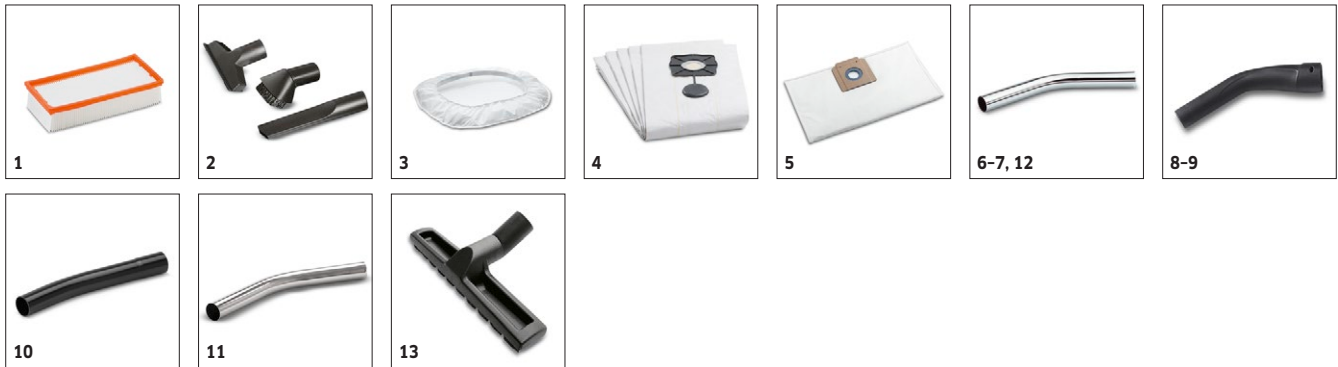

		Order no.	Quantity	ID	Length	Width	Price	Description	
Flat pleated filter, PES									
Flat pleated filter, PES	1	6.904-360.0	1 piece(s)					Flat pleated filter (PES) – BIA-C dust class M: rotproof polyester fleece, ideal for wet use and abrasives. Standard for NT 35/1 Eco BS and NT 55/1 Eco BS.	■
Nozzle kits									
Nozzle kit	2	2.860-116.0	1 piece(s)	ID 35				Nozzle kit for all NT vacuum cleaners with DN 35 accessories includes crevice tool, upholstery tool, round brush (x3)	□
Fabric filter									
Membrane filter	3	6.904-212.0	1 piece(s)					Polyester needle fleece membrane/fabric filter, washable up to 40°C, suitable for all NT 361 Eco to NT 611 Eco versions as an alternative to a filter bag.	□
Wet filter bag									
Wet filter bag	4	6.904-171.0	5 piece(s)					Approved for dust class L, general cleaning, wet and dry, tear-resistant.	□
Fleece filter bags (three-ply)									
Adv fleece filter bags	5	6.904-351.0	5 piece(s)					3-ply tear-resistant fleece filter bags (dust class M). For dry pick up, suitable for the following models: NT 361 Eco, Eco TE, TE-A and NT 361 Eco M, NT 35/1 Eco, Eco Te, Eco M. Contents: x5	□
Bends, stainless steel									
Bend, stainless steel, ID 35	6	6.903-141.0	1 piece(s)	ID 35				Stainless steel and crooked, ID 35	□
Bend, stainless steel, ID 40	7	6.902-079.0	1 piece(s)	ID 40				Stainless steel and crooked, ID 40	□
Bend, plastic									
Plastic bend	8	5.031-718.0	1 piece(s)	ID 35				Plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models (except NT Eco M and NT Eco H).	□
Bend, plastic, electrically conductive	9	5.031-939.0	1 piece(s)	ID 35				Electrically conductive plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models.	□
Bend, plastic	10	6.902-009.0	1 piece(s)	ID 35				Plastic, ID 35.	□
Bends, metal									
Bend, metal	11	6.900-519.0	1 piece(s)	ID 35				Robust, chromium-plated metal bend (DN 35), can be used instead of a plastic bend (with clip system adapter 5.407-112.0; C 35-DN 35, plastic, el.).	□
	12	6.900-276.0	1 piece(s)	ID 40				Robust, chromium-plated metal bend (DN 40), can be used instead of a plastic bend (with clip system adapter 5.407-111.0; C 40-DN 40, plastic, el.).	□
Floor nozzles									
Wet and dry floor nozzle	13	6.906-512.0	1 piece(s)	ID 35		300 mm		All-purpose plastic nozzle (DN 35) with 300 mm working width. With side rollers, brush strips (6.903-278.0) and squeegees (6.903-277.0). Only for NT vacuum cleaners.	□

■ Included in the scope of supply. □ Available accessories.

NT 35/1 TACT BS

1.184-700.0

KÄRCHER



		Order no.	Quantity	ID	Length	Width	Price	Description	
Multi-purpose nozzle, wet/dry	14	6.903-018.0	1 piece(s)	ID 40		370 mm		All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
	15	6.906-383.0	1 piece(s)	ID 40		450 mm		All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
	16	6.906-384.0	1 piece(s)	ID 35		370 mm		All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.	<input type="checkbox"/>
DN 40 wet/dry floor nozzle	17	6.907-408.0	1 piece(s)	ID 40		360 mm		Multi-purpose nozzle (ID 40), plastic, 360 mm working width. With side rollers, brush strips (6.905-878.0) and squeegees (6.905-877.0).	<input type="checkbox"/>
Car cleaning nozzles									
Car nozzle	18	6.906-108.0	1 piece(s)	ID 35		90 mm		Angled, flat, plastic car vacuuming tool with about 90 mm working width. Only for NT vacuum cleaners.	<input type="checkbox"/>
Oven nozzles									
Oven nozzle	19	4.130-104.0	1 piece(s)	ID 35		350 mm		Aluminium, for cleaning ovens with squeegee 6.900-517.0 and support squeegee 6.900-518.0, each 2x.	<input type="checkbox"/>
	20	4.130-173.0	1 piece(s)	ID 35		350 mm		For cleaning baking ovens with scratch bar.	<input type="checkbox"/>
Crevice nozzles									
Crevice nozzle	21	6.900-385.0	1 piece(s)	ID 35	210 mm			Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 210 mm.	<input type="checkbox"/>
	22	6.900-922.0	1 piece(s)	ID 35	500 mm			Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 370 mm.	<input type="checkbox"/>
	23	6.903-033.0	1 piece(s)	ID 40	290 mm			Plastic crevice tool (DN 40) for vacuuming in crevices and corners. Length: 290 mm.	<input type="checkbox"/>
	24	6.905-817.0	1 piece(s)	ID 40	400 mm			Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.	<input type="checkbox"/>
	25	6.906-240.0	1 piece(s)	ID 35	250 mm			Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 250 mm.	<input type="checkbox"/>
Rubber suction tools, nose 45°									
Rubber suction tool, nose 45°	26	6.902-104.0	1 piece(s)	ID 35	220 mm			45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	<input type="checkbox"/>
Combi-nozzles, dry									
Combi-nozzle, dry	27	6.906-511.0	1 piece(s)	ID 35		270 mm		Combination floor tool with changeover function, plastic (272 mm). With stainless steel base plate, thread catcher 6.905-417.0 and DN 35 connection.	<input type="checkbox"/>
Pipe dusting nozzles									
Pipe brush 35/100	28	6.903-035.0	1 piece(s)	ID 35				Plastic, pipe diameter 100 mm	<input type="checkbox"/>
Pipe brush 35/200	29	6.903-036.0	1 piece(s)	ID 35				Plastic, pipe diameter 200 mm	<input type="checkbox"/>
Suction brushes									
Suction brush	30	6.903-862.0	1 piece(s)	ID 35		70 mm		Rotatable suction brush (DN 35) with natural bristles (cow hair). Bristle size 70x45 mm. Only CV and NT vacuum cleaners.	<input type="checkbox"/>
Suction tubes, stainless steel									
Suction tube	31	6.902-081.0	1 piece(s)	ID 40	0.5 m			Stainless steel suction tube (DN 40, 0.5 m) only suitable for NT vacuum cleaners.	<input type="checkbox"/>
	32	6.906-531.0	1 piece(s)	ID 40	1 m			Stainless steel suction tube (DN 40, 1.0 m) only suitable for NT vacuum cleaners.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

NT 35/1 TACT BS 1.184-700.0

KÄRCHER



		Order no.	Quantity	ID	Length	Width	Price	Description	
Suction tubes, plastic									
Suction tube	33	6.900-384.0	1 piece(s)	ID 35	0.5 m			Plastic suction tube (DN 35, 1x0.5 m) only suitable for BV and T vacuum cleaners.	<input type="checkbox"/>
Suction tubes, metal									
Suction tube	34	6.900-514.0	1 piece(s)	ID 35	0.5 m			Chromium-plated metal suction tube (DN 35, 1x0.5 m), standard for virtually all single-motor industrial NT vacuum cleaners.	<input type="checkbox"/>
	35	6.900-275.0	1 piece(s)	ID 40	0.55 m			The suction tube (NW 40, 1 x 0.55 m) made from chrome-plated metal is standard in almost all commercial vacuum cleaners with twin motor. Optional for commercial single motor NT vacuum cleaner with suction hose NW 40.	<input type="checkbox"/>
Repair kits									
Repair kit, C 35	36	2.639-682.0	1 piece(s)	ID 35				Repair set (C35) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	<input type="checkbox"/>
Suction hoses (clip system)									
Suction hose	37	6.906-241.0	1 piece(s)	35	4 m			4 m suction hose without bend and adapter. With bayonet at vacuum end and C 35 clip connection at accessory end.	<input type="checkbox"/>
	38	6.906-275.0	1 piece(s)	35	2.5 m			2.5 m electrically conductive suction hose without bend and adapter with bayonet at vacuum end and C 35 clip connection at accessory end.	<input type="checkbox"/>
	39	6.906-500.0	1 piece(s)	35	4 m			4 m electrically conductive suction hose without bend and adapter with bayonet at vacuum end and C 35 clip connection at accessory end.	<input type="checkbox"/>
	40	6.906-321.0	1 piece(s)	40	4 m			4 m suction hose with bayonet and C 40 clip connection. Without bend and adapter.	<input type="checkbox"/>
	41	6.906-546.0	1 piece(s)	40	4 m			Electrically conductive, 4 m suction hose with bayonet and C 40 clip connection. Without bend and adapter.	<input type="checkbox"/>
	42	6.906-877.0	1 piece(s)	40	10 m			Suction hose with bayonet coupling, electrically conductive.	<input type="checkbox"/>
Suction hose (clip system), C 35, 10 m	43	6.906-242.0	1 piece(s)	C- 35	10 m			Electrically conductive 10 m suction hose with bayonet adaptor and C 40 clip adaptor. Without manifold or connection bushing.	<input type="checkbox"/>
Suction hoses complete									
Suction hose, complete	44	4.440-287.0	1 piece(s)	ID 35	4 m			Standard, 4.0m, ID 35	<input type="checkbox"/>
Complete suction hoses (clip system)									
Suction hose	45	4.440-626.0	1 piece(s)	ID 35	2.5 m			2.5 m standard suction hose with bend, bayonet at vacuum end and C 35 clip connection at accessory end. Without PDFC module. Standard for NT 27/1/Me Advance und NT 48/1.	<input type="checkbox"/>
Suction hose, electrically conductive	46	4.440-653.0	1 piece(s)	ID 35	2.5 m			2.5 m electrically conductive suction hose with bend, bayonet at vacuum end and C 35 clip connection at accessory end. Without module.	<input type="checkbox"/>
Special hoses									
Special suction hose, heat-resistant	47	4.440-731.0	1 piece(s)	ID 35	2.5 m			Special suction hose, DN 35, 2.5 m, for e.g. oven cleaning, temperature-resistant to 140°C, plastic - metal.	<input type="checkbox"/>
Extension hoses (clip system)									
Extension hose	48	6.906-344.0	1 piece(s)	ID 40	2.5 m			2.5 m electrically non-conductive standard extension hose for all C-40 hoses with clip system.	<input type="checkbox"/>
Connection adapter C ID (clip to cone), electrically conductive									
Connection adapter C DN 35	49	5.407-112.0	1 piece(s)	ID 35				C 35 hose connector for DN 35 accessory, electrically conductive.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

NT 35/1 TACT BS 1.184-700.0

KÄRCHER



		Order no.	Quantity	ID	Length	Width	Price	Description	
Connection adapter C DN 40	50	5.407-109.0	1 piece(s)	ID 40				Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
Expansion pieces (tube -> nozzle)									
Adapter ID 35 - 40 (tube -> nozzle)	51	6.902-084.0	1 piece(s)	ID 35				From DN 35 to DN 40: Plastic adapter (electrically non-conductive). Suitable for NT vacuum cleaners.	<input type="checkbox"/>
Reducing sleeves									
Reducer	52	5.407-108.0	1 piece(s)	ID 40				Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.	<input type="checkbox"/>
Reducers (tube -> nozzle)									
Reducer	53	6.902-017.0	1 piece(s)	ID 40				Reducer for accessory extension. Ideal for accessories with DN 35 connecting cone in combination with accessories with DN 40 connecting cone.	<input type="checkbox"/>
Reducer from ID 35 to ID 32	54	6.902-072.0	1 piece(s)	ID 35				Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.	<input type="checkbox"/>
Reduction/expansion adapter kit									
Set of reducers / adapter sleeves	55	2.860-117.0	1 piece(s)					DN 40/35, DN 35/32 (tube -> nozzle), plastic.	<input type="checkbox"/>
Target-group-specific accessory kits for vacuum cleaners									
Oven kit	56	2.640-341.0		ID 35				Accessory kit for vacuuming and cleaning ovens in bakeries, cake shops, etc.	<input type="checkbox"/>
Bakery kit, electrically conductive	57	2.640-436.0		ID 40				Accessory kit for vacuuming and cleaning bakeries, equipment, shelves, etc. Ideal for bakeries, cake shops, etc.	<input type="checkbox"/>
Flat pleated filter, PTFE									
Ultimate flat pleated filter	58	6.907-455.0	1 piece(s)					Ultimate flat pleated filter made from PES/PTFE fibre material with a black label. For the toughest applications when vacuuming liquids, fine dust and coarse dirt from dust classes M and L.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

NT 35/1 TACT BS 1.184-700.0



		Order no.	Length	Colour	Quantity	Price	Description	
Miscellaneous								
Extension cable	1	6.647-022.0	20 m		1 piece(s)		Extension cable, 20 m, 3x1.5 mm ² . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.